

MAY - 1 1995

OK - T. SMITH

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970


For corners in

_____ Oakland _____ (County)	Located in:	Addison Township	Corner Code #
1. Public Land Survey	T <u>5N</u>	R <u>11E</u>	<u>K-9</u>
	T _____	R _____	_____
	T _____	R _____	_____
	T _____	R _____	_____
2. Property Controlling in Section	S _____	T _____	R _____
	S _____	T _____	R _____
3. Miscellaneous Property in Sec.	S _____	T _____	R _____
	S _____	T _____	R _____
4. Lot No. _____, Recorded Plat _____			
5. Private Claims _____			

\$ 7.00 MISCELLANEOUS RECORDING
 \$ 2.00 REMONUMENTATION
 2 FEB 95 7:24 A.M. RECEIPT# 28
 PAID RECORDED - OAKLAND COUNTY
 LYNN D. ALLEN, CLERK/REGISTER OF DEEDS

Compliance with
 ACT 345, P.A. 1990

APPROVED ON: 11-30-94
 OAKLAND COUNTY REMONUMENTATION
 PEER GROUP COMMITTEE
 Register of Deeds Stamp & File Number

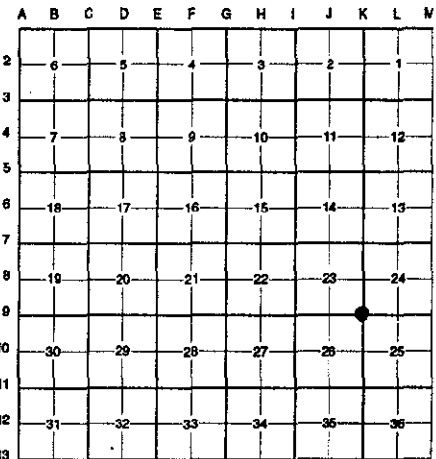

I, Randy Kolehouse, in a field survey on July 18 19 94, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-9 Per G.L.O. notes, J. Wampier set a post in 1817.

O.C.R.C. 1962 1" x 18" Iron NE 55.10' Nail 10" Apple SE 52.8' Nail 12" Apple SE 67.4' Nail 18" Locust	L.C.R.C. L. 7522 P. 272 1979 "T" Iron P.K. Nail in 12" Locust WNW 65.88' P.K. Nail in 14" Locust NNW 29.98' P.K. Nail in 7" Locust SW 54.91'	L.C.R.C. L. 8075 P. 757 1981 "T" Iron North 22.51' P.K. in Cor. Fence Post S 75° E 136.42' Nail & Cap in Fence Post	Rec. Survey L. 11501 P. 111 1989 "T" Iron P.K. 14' Maple NNE 66.25' P.K. 30' Maple ESE 71.15 Nail & Cap #17623 30' Maple NNW 79.73'
---	--	---	---

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-9 Found 1" iron bar 12' South of north line Mack Road (gravel) running E-W and 2' West of east line Townsend Road running South (gravel) with "T" iron 0.2' to the northwest and checked witnesses.

L.C.R.C. L. 7522 P. 272 1979 P.K. Nail in SE Side 10" Locust S 60° W 54.92' P.K. Nail in S Side 14" Locust N 65° W 65.89'	L.C.R.C. L. 8075 P. 757 1981 P.K. NW side Fence Post N 0° E 22.53'
---	---

King & King Measures East to L-9 2643.86'
 King & Kobs Measures North to K-8 2740.02'
 Kogs Measures South to K-10 2611.22'

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-9 Set a 5/8" rebar with brass cap stamped "Oakland County Remonumentation P.S. #25854" in place of found 1" iron bar.

- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in SE Side 10" Locust S 60° W 54.92'
- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in S Side 14" Locust N 65° W 65.89'
- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in W Side Fence Post N 0° E 22.53'
- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in SW Side P.E. Pole N 33° W 70.42'
- PK Nail & Tag Stamped "Oakland Co. Remonumentation P.S. #25854" in W Side 18" Pine S 25° E 66.18'

The selected location is accepted by the Contractor and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.



Signed by Randy J. Kolehouse
 Surveyor's Michigan License No. 25854

Date 12/23/94