

**SURVEY &
REMONUMENTATION**

AUG 27 1996

COMMISSION

**LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

Osceola

(County)

Located In:

Corner Code ##

17N 10W

F-13

- | | | | | | |
|---------------------------------------|---|-------|---|-------|-------|
| 1. Public Land Survey | T | _____ | R | _____ | _____ |
| | T | _____ | R | _____ | _____ |
| | T | _____ | R | _____ | _____ |
| | T | _____ | R | _____ | _____ |
| 2. Property Controlling
in Section | S | _____ | T | _____ | R |
| | S | _____ | T | _____ | R |
| 3. Miscellaneous
Property in Sec. | S | _____ | T | _____ | R |
| | S | _____ | T | _____ | R |

APPROVED LAND CORNER
P.A. 345 OF 1990
Osceola County

Matthew McClung
25 July 1996

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

Matthew McClung

July 1 96

I, _____, in a field survey on _____, 19 _____, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5		4	3				2				1
3													
4	7	8		9	10				11				12
5													
6	18	17		16	15				14				13
7													
8	19	20		21	22				23				24
9													
10	30	29		28	27				26				25
11													
12	31	32		33	34				35				36
13													

A. Description of original monument and accessories and/or subsequent restoration:

The original corner was set by deputy surveyor John Hodgson on 2 Nov. 1837. Set wood post at 40.00 chains from East.
Beech 7" N46E 23 lks.
Iron Wood 8" N30W 18 lks.


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

From 1891 to 1904 approximately, Osceola County had a remonumentation program, in which surveyors Temple and Trumbull, did the work. For the most part, a 3" glazed tile filled with cinders from a forge, were placed at each government set corner in the township. There were supposed to be 3 tile per corner, placed atop of each other, (continued on back)

Found 1/2" x 18" rod in monument box 3" below surface removed rod and monument box and excavated to 23 " and found 1/8" X 1" strap iron. Place Osceola County Monument in box 3" below surface. Corner is 8" North of centerline and is 5.25' West from Mecosta County Corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner F-13. Osceola County Monument, which is a 3" brass cap mounted on 1" pipe 18" in length.
Chain Link Fence Post North 38.45 feet.
Chain Link Fence Post N10E 39.85 feet.
Chain Link Fence Post N34E 48.80 feet.
Rail Road Tie Fence Post S10E 32.6 feet. O.B.P.

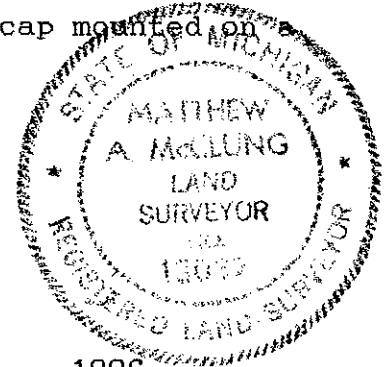

Signed by *Matthew McClung*

Date July 1, 1996

Surveyor's Michigan License No. 13037

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983

OSCEOLA COUNTY
REGISTER OF DEEDS

96 AUG -7 PM 4:31

Nancy Crawford

thereby making the corner 4 feet long. Sometimes a solid tile, with a cross in the top was used, and sometimes a 1/2" iron bars were added to the tile. Notes of the work were kept in ledgers, and given to the townships, and 5 of the townships have been recorded in the County records.

There are 2 LCRC; Liber 1, Page 328; Liber 2 page 292.

There are to PA 132 Surveys record Liber 595, pages 208 and 209 ; Liber 278, page 219.