

**SURVEY &
REMONUMENTATION**

JUN 09 1997

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Osceola</u> (County)	Located in:	Corner Code #
1. Public Land Survey	T18NRBW	F-10
	T___R___	_____
	T___R___	_____
	T___R___	_____
2. Property Controlling in Section	S___T___R___	_____
	S___T___R___	_____
3. Miscellaneous Property in Sec.	S___T___R___	_____
	S___T___R___	_____

APPROVED LAND CORNER
P.A. 245 OF 1990
Osceola County
Matthew McClung
24 April 1997
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Matthew McClung, in a field survey on Apr 21, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.
Act 74: None
Act 132: None

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

Osceola Township Book: None
Distance E-10 to F-10 = 2631.53 feet.
Distance F-10 to G-10 = 2620.41 feet.
Distance F-11 to F-10 = 2639.55 feet.
Distance F-10 to F-9 = 2639.67 feet.


James Wood
97 APR 30 PM 12: 33
OSCEOLA COUNTY
REGISTER OF DEEDS

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1/2" rod & cap No. 24025 (D. Wood) in center of North & South road.
Found 1/2" rod & cap East 33.0 feet from Iron. The center by Wood is 0.437 North and 0.003' East of my calculated position for intersection of 1/4 line. I used his stake for the center of section.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner F-10. Osceola County Monument, which is a 3" brass cap mounted on a 1" pipe 18" in length.
18" R. Pine N46E 44.80 feet.
1/2" rod & cap No 24625 East 33.0 feet.
8" Jack Pine S70W 47.8' O.B.T.
8" W. PINE N78W 40.97 feet. O.B.T.

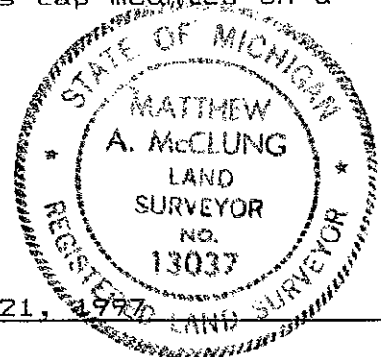

Signed by *Matthew McClung*
Surveyor's Michigan License No. 13037

Date April 21, 1997