

**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

<u>Osceola</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>18N</u> R <u>9W</u>	<u>K-11</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

APPROVED LAND CORNER  
P.A. 345 OF 1990  
Osceola County

*Matthew McClung*  
8 Dec 1993

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Matthew McClung, in a field survey on November 30, 1993, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:


**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
The original corner was set by deputy surveyor John Hodgson on 10 June 1838. Set wood post 80 chains from South  
Maple 9" N67W 48 lks.  
Maple 9" N54E 28 lks.

This corner is recorded in the Cedar Twp. Book, pages 32 and 33, as Corner 4. 3" N85W 56 Lks., piece of buggy axle.

This corner has a PA. 74 certificate, dated Aug. 3, 1977 by Pierson.  
(continued on back)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
Found state cap set in cement post, stating SE Corner of Section 26, T18N-R9W. Left State Monument in place. Pierson's PA. 74 certificate, under b states "Set concrete monument", and under C states "Brass capped Mon.". This corner is set in a fence row to the south, broken off corner fence post is 34./3 feet, and lies to east of fence line.

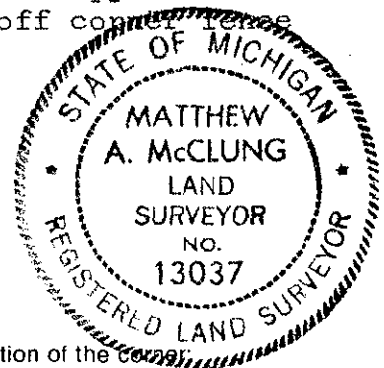

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
Corner K-11. State brass cap set in concrete post, stamped SE Corner of Section 26 T18N-R9W.  
8" R. Oak N32W 39.15 feet. OBT  
6" Maple N63E 53.52 feet. OBT  
D.N.R. Witness post North 33.0 feet.  
Center of 3' X 3' X 20" Rock N55E 39.51 feet.

Signed by Matthew McClung Date November 8, 1993  
Surveyor's Michigan License No. 13037

OSCEOLA COUNTY  
REGISTER OF DEEDS

93 DEC 10 PH 2:49

*Nancy Crawford*

One recorded survey of record.