

JAN 17 1996

COMMISSION

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Osceola</u> (County)	Located In:	Corner Code #
	18N 10W	C-2
1. Public Land Survey	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

APPROVED LAND CORNER  
P.A. 345 OF 1990  
Osceola County

19 OCT 1995  
*Matthew McClung*

Register of Deeds Stamp & File Number

Matthew McClung October 14, 1995  
I, \_\_\_\_\_, in a field survey on \_\_\_\_\_, 19\_\_\_\_\_,  
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned  
in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the  
current manual of survey instructions of the United States Department of the Interior, Bureau of Land  
Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5  
above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a  
Court of Law; established, re-established, monumented, re-monumented, recovered, found as  
expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded  
on this certificate.**


	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

The original corner was set by deputy surveyor John Hodgson on 10 June  
1838. Set wood post 40.00 chains from South.  
Beech 7" N89W 24 lks.  
Beech 7" N32E 20lks.  
I have shown one LCRC certificate by Gray  
I have shown one Act 132 survey by Geers.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1/2" re-bar at 6" depth. Excavated to 1.8 feet and used Shonsted  
found no other evidence. Set Osceola County Monument over re-rod in  
position at 6" below surface. Corner is in a road cut to marsh to South,  
Probably 4 feet on East and 3 feet on West. There are Old Fence rows East  
and West from corner.

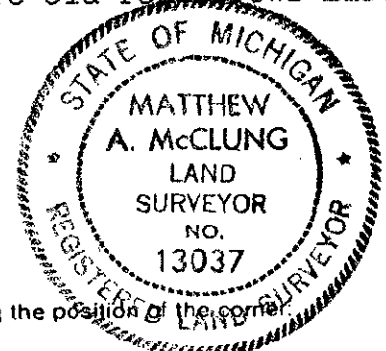

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner C-2. Osceola County Monument, which is a 3" brass cap mounted on a  
1" pipe 18" in length.  
Power Pole Az 275 degrees 58.42 feet. O.B.T.  
Nail in 11" N Pine Blazed N54E 63.77 feet.  
Nail in 10" Aspen Blazed S30E 55.70 feet.  
Nail in 10" S. Maple Blazed S45W 61.03 feet.  
Nail in 12" Treated Post West 33.70 feet.

OSCEOLA COUNTY  
REGISTER OF DEEDS  
95 NOV 13 PM 4:52  
*Honey Campbell*

Signed by Matthew McClung Date October 14, 1995  
Surveyor's Michigan License No. 13037