

SURVEY & REMONUMENTATION

SEP 15 1994

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

LIBER A PAGE 188

For commission
Osceola
 (County)

Located In: _____ Corner Code =# _____

1. Public Land Survey	T <u>20N</u> R <u>7W</u>	<u>E-2</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

APPROVED LAND CORNER
P.A. 345 OF 1990
Osceola County

Matthew McClung
26 July 1994

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, Matthew McClung a field survey on June 19, 191994


do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	13	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:
 The original corner was set by deputy surveyor Francis Coleman on Aug. 1, 1856. Set wood post 65.70 chains from the North.
 Beech 8" N60W 14 lks.
 Hemlock 10" S68E 5 lks.
 From 1891 to 1904 approximately, Osceola County had a remonumentation program, in which surveyors Temple and Trumbull, did the work. For the most part, a 3" glazed tile filled with cinders from a forge, were placed at each government set corner in the township. There were supposed to be 3 tile per corner, placed atop of each other, (continued on back)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 Found Tile, iron & Cap No. 13037 and steel fence post 2 ft. ground.
 Removed iron & cap and placed Osceola County Monument in center of tile.

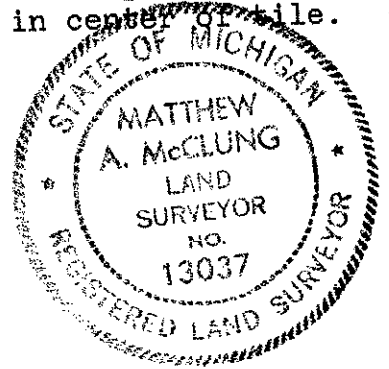

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 Corner E-2. Osceola County Monument, which is a 3" brass cap mounted on a 1" pipe 30" in length.
 North and South fence over corner.
 8" White Birch S05W 78.0 feet.
 East and West drainage ditch North 158.0 feet.
 Pine Stump S40W 169.50 feet.

Signed by Matthew McClung Date June 19, 1994
 Surveyor's Michigan License No. 13037

OSCEOLA COUNTY
REGISTER OF DEEDS

94 AUG 31 PM 4:17

Harvey Crawford

thereby making the corner 4 feet long. Sometimes a solid tile, with a cross in the top was used, and sometimes a 1/2" iron bars were added to the tile. Notes of the work were kept in ledgers, and given to the townships, and 5 of the townships have been recorded in the County records.

This corner has two LCRC recorded by McClung.

