

SURVEY & REMONUMENTATION

APR 25 1995

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Osceola
(County)

Located In:

Corner Code #

- 1. Public Land Survey 20N 8W K-9
 T R
 T R
 T R
- 2. Property Controlling S T R
 in Section S T R
- 3. Miscellaneous S T R
 Property in Sec. S T R

APPROVED LAND CORNER
 P.A. 345 OF 1990
 Osceola County

Matthew A. McClung
 29 Nov 1994

Register of Deeds Stamp & File Number

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							

Matthew McClung, in a field survey on June 19, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

The original corner was set by deputy surveyor Sylvester Sibley, 7 July 1838. Set wood post 80.00 chains from the South.

Sugar 16" S17W 20 lks.

Sugar 8" S48E 16 lks.

From 1891 to 1904 approximately, Osceola County had a remonumentation program, in which surveyors Temple and Trumbull, did the work. For the most part, a 3" glazed tile filled with cinders from a forge, were placed at each government set corner in the township. There were supposed to be 3 tile per corner, placed atop of each other, (continued on back)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found Monument box with 1/8" X 1" strap iron 14" below surface. Set Osceola County Monument 4" below surface, Over strap iron. The corner is located on the very North edge of the road surface. The corner used to be in the apron until they widened the asphalt.



C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner K-9. Osceola County Monument, which is a 3" brass cap mounted on a 1" pipe 18" in length.

32" Maple N70E 99.9 feet.

Power Pole N50E 67.1 feet.

SE corner of triangular R/W marker N40E 67.55 feet.

6" Spruce N50E 106.3 feet.

Signed by *Matthew McClung*

Date November 6, 1993


Surveyor's Michigan License No. 13037

OSCEOLA COUNTY

OSCEOLA COUNTY
REGISTER OF DEEDS

94 DEC -7 PM 2:51

Nancy Crawford

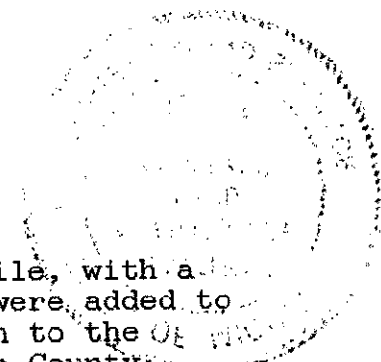

thereby making the corner 4 feet long. Sometimes a solid tile, with a cross in the top was used, and sometimes a 1/2" iron bars were added to the tile. Notes of the work were kept in ledgers, and given to the townships, and 5 of the townships have been recorded in the County records.

This corner has a PA 132 recorded

RECEIVED
OSCEOLA COUNTY REGISTER OF DEEDS
DEC 7 1994