


OTSEGO COUNTY REMONUMENTATION  
**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. PA 1970

For Corners In:  
Otsego Located In Otsego Lk. Twp. Corner Code #  
 (County)

1. Public Land Survey	T	<u>29N</u>	R	<u>3W</u>	<u>A-10</u>
	T	_____	R	_____	_____
2. Property Controlling in Section	S	_____	T	_____	R
	S	_____	T	_____	R
3. Miscellaneous Property in Section	S	_____	T	_____	R
	S	_____	T	_____	R

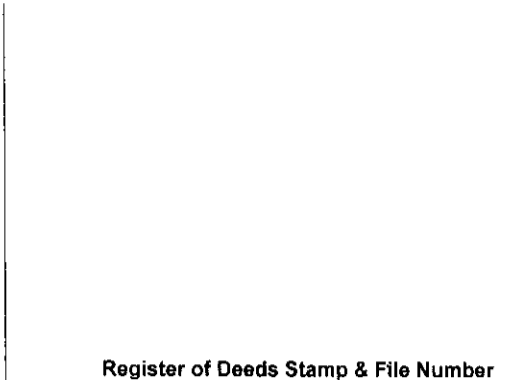

4. Lot No: \_\_\_\_\_ Recorded Plat: \_\_\_\_\_

5. Private Claims: \_\_\_\_\_

I, Carl T. Kiiskila, in a field survey on October 10, 2002 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

A-10 G.L.O. James H. Mullet 1839  
 Set quarter section post  
 Wit: Beech 12 S44°W 15 links ( 9.9' )  
 Pine 20 N55°W 19 links ( 12.5' )

Wade-Trim Inc. 1987 tied to corner while doing a survey in section 19 T.29W., R.3W. Type of monument and witnesses were not given.

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:

A-10 Found 1/2" X 18" rerod with three new bearing trees blazed and large nail set for witnesses. Also found the possible remains of one of the original bearing trees.  
 Pine 20" N55°W 19 links

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-10 Set Otsego County Monument in place of the 1/2" rebar accepted as the best available evidence of the position of the original corner.

Wit: *10" Maple	N43°E	18.85'
8" Maple	S45°E	18.31'
*12" Beech	S13°W	5.93'
10" Maple	West	19.26'
*16" Pine Stump	N04°E	30.3±
Pine Stump remains	N60°W	12.5'
Carsonite Post	North	1±

\* Old witnesses by others look to be about 20 years old.



Signed by: Carl T. Kiiskila  
 Surveyor's Michigan License No.: 33981

Date: 12-23-02