

1893

RECORDED

Ottawa County Remonumentation
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

93 DEC 15 AM 9:25

COMMISSION


For corners in

John C. Bueche
REGISTER OF DEEDS
OTTAWA COUNTY, MI

Ottawa (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>5N</u> R <u>14W</u>	E-5 (SE, 8) Zeeland Twp.
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

Register of Deeds Stamp & File Number

I, John C. Bueche, in a field survey on November, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

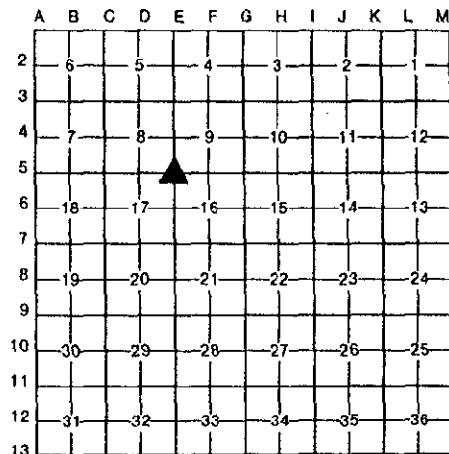

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

E-5 LCRC (L4, P53), May 15, 1980 Set C.I.M.	E-5 LCRC (L4, P42), March 17, 1980 1/2" pipe	E-5 LCRC (L2, P673), Oct. 22, 1974 1/2" bar
C/L 21" Beech NE 46.12'	Nail in face 29" Beech	PP NE 66.97'
C/L PP NE 67.65'	N 60° E 46.13'	PP SE 70.30'
C/L Warning sign E 20.10'	GP S 10° W 64.50'	C/L st. sign NW 30.54'
C/L PP SE 70.82'	PP S 25° E 70.83'	
C/L Support pole SW 65.21'	PP N 40° E 67.43'	
C/L Warning sign SW 37.80'		

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-5 Found O.C. Mon. (4" Harrison) in gravel road, down 10"		
C/L PP NE 67.65'	GP S 10° W 64.50'	PP NE 66.97'
C/L PP SE 70.82'	PP S 25° E 70.83'	PP SE 70.30'
C/L Support pole SW 65.21'	PP N 40° E 67.43'	


And is accepted as a careful and faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-5 O.C. Mon. (4" Harrison), 10" down	
Conc. Nail & O.C. Remon. Tag in SE side PP	N 60° E 67.60'
Conc. Nail & O.C. Remon. Tag in E side 6" Maple	N 30° W 92.20'
Conc. Nail & O.C. Remon. Tag in E side GP	S 25° W 64.98'
Conc. Nail & O.C. Remon. Tag in W side PP	S 20° E 70.61'
C/L gravel road N-S, E 2.5'±	
C/L gravel road W, N 4'±	

Signed by John C. Bueche
Surveyor's Michigan License No. 13027

Date Nov. 29, 1993



FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1976
REVISED JAN., 1983