

OTTAWA COUNTY REMONUMENTATION

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

David R. Greer
REGISTER OF DEEDS
OTTAWA COUNTY, MI

For corners in

Ottawa

(County)

Located In:

Corner Code #


- | | | | | | |
|------------------------------------|---|----|---|-----|--------------------|
| 1. Public Land Survey | T | 6N | R | 16W | G-4 (W 1/4 Sec 10) |
| | T | | R | | Park Twp. |
| | T | | R | | |
| | T | | R | | |
| 2. Property Controlling in Section | S | | T | R | |
| | S | | T | R | |
| 3. Miscellaneous Property in Sec. | S | | T | R | |
| | S | | T | R | |

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, David R. Greer, in a field survey on September 15, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

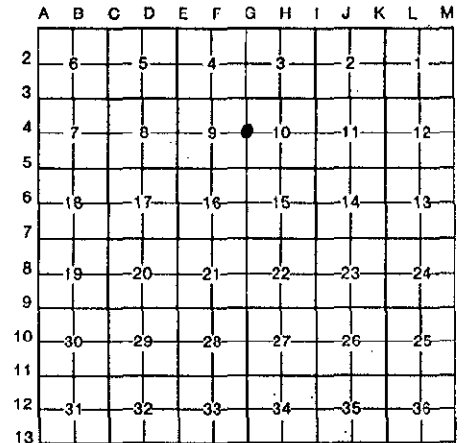

A. Description of original monument and accessories and/or subsequent restoration:

Recorded in Liber 1 Page 799, Dec. 8, 1972

G-4

Found monument box & pipe

- 28" Catalpa SE 80.82'
- Tele. Pole SE 76.18'
- Power Pole NW 42.67'

Recorded in Liber 5 Page 114, June 27, 1984

G-4

Cast Iron Monument

- 15" Sassafras ESE 64.91'
- Tele. Pole SE 76.39'
- Power/Light Pole NE 41.58'
- Tele. Pole NW 43.23'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

G-4

Found cast iron monument and accepted it as a careful and faithful perpetuation of the position of the original corner

- 15" Sassafras ESE 64.91'
- Tele Pole SE 76.39'
- Tele Pole NW 43.23'

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-4

Found broken C.I.M. in monument box Set O.C Monument Iron & Cap

AZ - Michigan State Grid Direction

- CL top of hydrant AZ. 140°03' 49.97'
- O.C. Remon tag & nail in SE Side Power Pole AZ. 42°50' 38.19'
- O.C. Remon tag & nail in SW Side 10" Pine AZ. 316°54' 70.81'
- Found P. K. in East Side of Power Pole AZ. 194°10' 138.84'

Signed by

David R. Greer

Date

9/15/93

Surveyor's Michigan License No.

16042

