

SURVEY & REMONUMENTATION

APR 24 1995

COMMISSION

OTTAWA COUNTY REMONUMENTATION LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

91 DEC 14 AM 9:41

Robert J. Williams
REGISTER OF DEEDS
OTTAWA COUNTY, MI


For corners in

<u>Ottawa</u> <small>(County)</small>	Located In:	Corner Code #	
1. Public Land Survey	T <u>5N</u> R <u>16W</u>	<u>K-5 (NW Cor Sec 13)</u>	
	T _____ R _____	<u>Park Twp.</u>	
	T _____ R _____	_____	
	T _____ R _____	_____	
2. Property Controlling in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, John P. Clapp, in a field survey on November 28, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

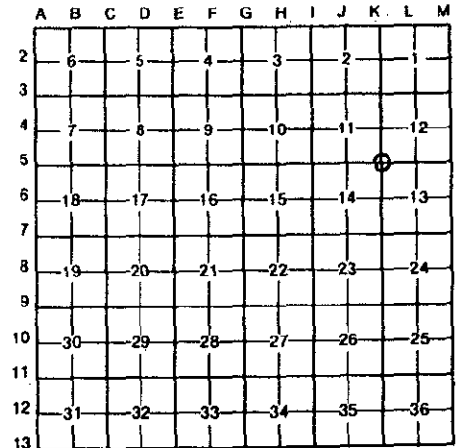

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-5 Govt Land Office Survey Notes 1832-Surveyor, Calvin Britain Set Post 16" Beech N16°W 10 links 9" Beech S44°E 21 links	K-5 Recorded in Liber 2 Page 87, Mar 23, 1973 Fd Iron in Monument Box NE Cor SE Wing Culvert NW Cor SW Wing Culvert NW Cor NW Wing Culvert NE Cor NE Wing Culvert	K-5 Recorded in Liber 5 Page 141, Jun 27, 1984 Fd Iron Bar, Set CIM St Sign 15" Tree 14" Poplar Power Pole
	S 20.28'	SE 48.62'
	SW 30.54'	WNW 64.30'
	WNW 27.92'	NW 66.40'
	N 13.30'	NE 75.89'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


K-5
Found cast iron monument in monument box and accepted it as a careful and faithful perpetuation of the position of the original corner

Street Sign	AZ 133°	48.62'
Found Nail S Side Power Pole	AZ 61°	75.88'

P.A. 345 OTTAWA COUNTY
PEER APPROVED 12/12/94
Madison D. Nedewell

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-5 Cast Iron Monument in Monument Box		
O.C. Remon Tag & Nail NNW Side Power Pole	AZ. 61°	76.01"
O.C. Remon Tag & Nail SW Side 14" Oak	AZ. 111°	141.54'
O.C. Remon Tag & Nail N Side 36" Oak	AZ. 252°	145.82'
O.C. Remon Tag & Nail SW Side 22" Oak	AZ. 311°	66.35'



-Signed by John P. Clapp Date Dec 2, 1994
-Surveyor's Michigan License No. 14091