

# SURVEY & REMONUMENTATION

APR 25 1995

OTTAWA COUNTY REMONUMENTATION  
LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC -8 PM 12:31

COMMISSION

*Reginald R. Belmont*  
REGISTER OF DEEDS  
OTTAWA COUNTY, MI

For corners in

<u>Ottawa</u> <small>(County)</small>	Located In:	Corner Code #/
Public Land Survey	T <u>6N</u> R <u>16W</u>	<u>J-7 (N1/4 Cor. Sec 23)</u>
	T _____ R _____	<u>Part Sheldon Twp.</u>
	T _____ R _____	_____
	T _____ R _____	_____
Property Controlling	S _____ T _____ R _____	_____
in Section	S _____ T _____ R _____	_____
Miscellaneous	S _____ T _____ R _____	_____
Property in Sec.	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
Private Claims \_\_\_\_\_

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

John P. Clapp, in a field survey on November 15, 19 94,  
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned  
in lines 1 and 2 above were in conformance with regulations and rules theretore as required in the  
current manual of survey instructions of the United States Department of the Interior, Bureau of Land  
managment or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5  
above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a  
court of Law; established, re-established, monumented, re-monumented, recovered, found as  
expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded  
on this certificate.**

Description of original monument and accessories and/or subsequent restoration:

<p><b>J-7</b> Govt Land Office Survey Notes May 1832, Surveyor Calvin Britain Post 18" Beech is post</p>	<p><b>J-7</b> Recorded in Liber 2 Page 229, June 25, 1973 Found 1" Iron 20" Beech                      NNW    80.65' 13" Cherry                     ENE    109.45' 10" Poplar                      ESE    40.57'</p>
--	--


Description of corner evidence found and/or method applied in restoring or reestablishing corner:

**J-7**  
Found 1" steel bar and accepted it as a careful and faithful perpetuation  
of the position of the original corner  
Found Nail in Face 26" Beech                      AZ 338°                      60.56'  
Found Nail in W Face 14" Cherry                      AZ 89°                      109.52'

PA. 345 OTTAWA COUNTY  
PEER APPROVED 11/21/94  
*Verdy P. Hedwood*

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

**J-7**  
Set D.C. Remon Cap & Iron  
D.C. Remon tag & nail in NW Side 12": Tw. Cherry                      AZ.    218°    53.61'  
D.C. Remon tag & nail in E Side 24" Beech                                      AZ.    338°    61.36'  
O.C. Remon tag & nail in SW Side 7" Maple                                      AZ.    146°    31.88'  
D.C. Remon tag & nail in NW Side 7" Maple                                      AZ.    47°    23.01'

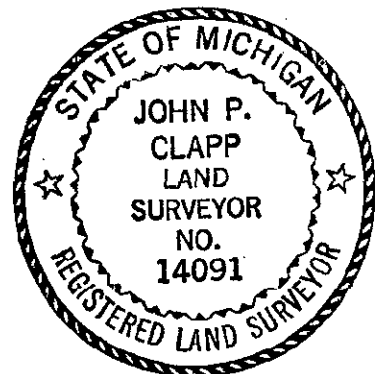

Signed by John P. Clapp *John P. Clapp* Date Nov. 16, 1994  
Surveyor's Michigan License No. 14091