

SURVEY & REMONUMENTATION

APR 25 1995

OTTAWA COUNTY REMONUMENTATION
 LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC -8 PM 12:31

For corners in **COMMISSION**

Edyette Williams
 REGISTER OF DEEDS
 OTTAWA COUNTY, MI

<u>Ottawa</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>6N</u> R <u>16W</u>	<u>K-7 (NW Cor. Sec. 24</u> <u>Port Sheldon Twp.</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

Register of Deeds Stamp & File Number

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

John P. Clapp in a field survey on November 14, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-7 Gov't Land Office Survey Notes May 1832 - Surveyor, Calvin Britain Post 12" Beech N40°W 12 links 6" Hemlock S48°E 16 links	K-7 Recorded in Liber 1 Page 37, June 29, 1971 Nail in P.P. NE 73.08' CL St. Sign NE 39.68' Nail in P.P. WNW 229.01'	K-7 Recorded in Liber 5 Page 78, Dec. 20, 1983 Set Cast Iron Monument Twin 8" Poplar SW 88.45' Tele. Ped. SW 51.04' CL St. Sign NE 39.65' 8" Pine ENE 89.50'
--	--	--

3. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


K-7 Found cast iron monument and accepted it as a careful and faithful perpetuation of the position of the original corner Nail in NW Side of 15" Twin Poplar Nail in N Side of 10" Pine Nail & Cap SSE Side of Power Pole Telephone Pedestal	AZ. 198° 86.93' AZ. 71° 89.50' AZ. 49° 73.52' AZ. 225° 50.35'
---	--

PA. 345 OTTAWA COUNTY
 PEER APPROVED 11/21/94

Madison D. Nedrow

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-7 Found Ottawa County Cast Iron Monument O.C. Remon tag & nail in E Side 15" Twin Poplar O.C. Remon tag & nail in NNW Side 10" Pine O.C. Remon tag & nail in W Side 11" Pine O.C. Remon tag & nail in NW Side Power Pole	AZ. 198° 86.81' AZ. 71° 89.63' AZ. 330° 57.72' AZ. 49° 73.62'
--	--

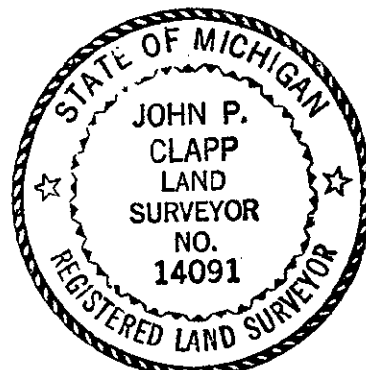

Signed by John P. Clapp *John P. Clapp* Date Nov. 14, 1994
 Surveyor's Michigan License No. 14091