

SURVEY & REMONUMENTATION

APR 25 1995

COMMISSION

OTTAWA COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC -8 PM 12: 31

D. Lyell's
REGISTER OF DEEDS
OTTAWA COUNTY, MI

For corners in
Ottawa

For corners in Ottawa <small>(County)</small>	Located In:	Corner Code #	
1. Public Land Survey	T <u>6N</u> R <u>16W</u>	M-3 (NE Cor Sec 12)	Port Sheldon Twp.
	T _____ R _____		
	T _____ R _____		
	T _____ R _____		
2. Property Controlling in Section	S _____ T _____ R _____		
	S _____ T _____ R _____		
3. Miscellaneous Property in Sec.	S _____ T _____ R _____		
	S _____ T _____ R _____		
4. Lot No. _____, Recorded Plat _____			
5. Private Claims _____			

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

I, John P. Clapp, in a field survey on November 16, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

<p>M-3 Gov't Land Office Survey Notes May 1832 - Surveyor, Calvin Britain 15" Beech is post</p>	<p>M-3 Recorded in Liber 1, Page 641, Oct. 13, 1972 Set Cast Iron Monument 8" Red Pine NW 11.19' 10" Red Pine SW 15.62' 7" Twin Pine WSW 22.19' 12" Red Pine SSW 19.02'</p>
--	--

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


<p>M-3 Found cast iron monument and accepted it as a careful and faithful perpetuation of the position of the original corner Found Nail & Tag in Face 12" Pine Found Nail & Tag in E Side 7" Twin Pine Found Nail & Tag in N Side 12" Pine Found Tag Pinched in Bark SE Side 12" Pine</p>	<p>AZ. 218° 15.63' AZ. 268° 22.30' AZ. 192° 19.40' AZ. 305° 11.11'</p>
---	--

PA. 345 OTTAWA COUNTY
PEER APPROVED 11/21/94

Robert P. Redwood

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

<p>M-3 Ottawa County Cast Iron Monument O.C. Remon tag & nail in E Side 13" Pine O.C. Remon tag & nail in SW Side 13" Pine O.C. Remon tag & nail in N Side 16" Pine O.C. Remon tag & nail in E Side 7" Pine</p>	<p>AZ. 347° 18.31' AZ. 305° 11.60' AZ. 260° 35.94' AZ. 209° 20.58'</p>
--	--

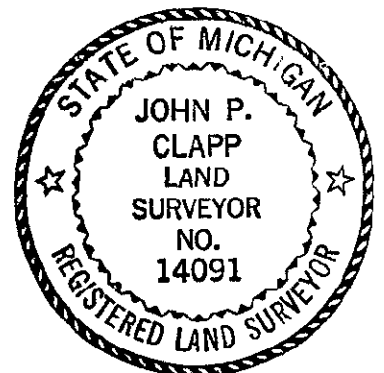

Signed by John P. Clapp Date Nov 17, 1994

Surveyor's Michigan License No. 14091

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983