

SURVEY & REMONUMENTATION

APR 25 1995

COMMISSION

OTTAWA COUNTY REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC -8 PM 12:31

Edythe Robinson
REGISTER OF DEEDS
OTTAWA COUNTY, MI

For corners in

<u>Ottawa</u> <small>(County)</small>	Located In:	Corner Code #
1. Public Land Survey	T <u>6N</u> R <u>16W</u>	<u>M-5 (SE Cor Sec 12)</u>
	T _____ R _____	<u>Port Sheldon Twp.</u>
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

John P. Clapp, in a field survey on November 15, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

<p>M-5 Govt Land Office Survey Notes May 1832, Surveyor Calvin Britain Post 6" Beech S24°W 32 links 5" W. Ash N22°W 7 links</p>	<p>M-5 Recorded in Liber 1 Page 407, May 26, 1972 Found 1 1/4" Iron Pipe 12" Cherry NE 192.28' Cor Fn Post S 12.81' Triple Cherry SSE 84.50' Double Cherry SE 99.18' 12" Cherry SE 132.83' Olive Twp Cor S 80.02'</p>	<p>M-5 Recorded in Liber 4 Page 303, Apr. 12, 1982 Set Cast Iron Monument 12" Cherry NE 192.28' Cor Fn Post S 12.81' Trip 8" Cherry SSE 84.50' Dbl 10" Cherry SE 99.18' Olive Twp Cor S 80.02'</p>
--	--	---

3. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

M-5
Found cast iron monument and accepted it as a careful and faithful perpetuation of the position of the original corner

Found Nail & Tag in Face 16" Cherry	AZ 46°	192.28'
Found Nail & Tag in 8" Triple Cherry	AZ 160°	84.50'
Found Nail & Tag in 10" Dbl Cherry	AZ 147°	99.18'
Olive Twp. Corner	AZ 180°	80.02'


P.A. 345 OTTAWA COUNTY
PEER APPROVED 11/21/94

Andrey D. Nedwell

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-5
Found O.C. Cast Iron Monument

O.C. Remon tag & nail in S Side 12" Maple	AZ.	257°	30.34"
O.C. Remon tag & nail in SW Side 10" Poplar	AZ.	308°	57.74"
O.C. Remon tag & nail in S Side 16" Cherry	AZ.	46°	192.70'
O.C. Remon tag & nail in N Side 10" Pine	AZ.	126°	75.52'
Olive Twp Corner			S 80.02'

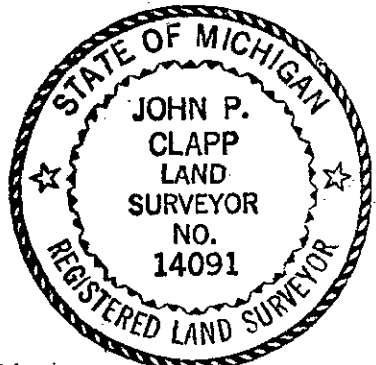

Signed by John P. Clapp *John P. Clapp* Date Nov 16, 1994

Surveyor's Michigan License No. 14091