

**SURVEY &
REMONUMENTATION**

APR 25 1995

OTTAWA COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC -8 PM 12: 31

COMMISSION

For corners in

Stephen R. Caldwell
REGISTER OF DEEDS
OTTAWA COUNTY, MI

| | | |
|---------------------------|--------------------------|---------------------------------|
| <u>Ottawa</u> (County) | Located In: | Corner Code # |
| Public Land Survey | T <u>8N</u> R <u>16W</u> | <u>M-8 (E 1/4 Cor., Sec 24)</u> |
| | T _____ R _____ | <u>Port Sheldon Twp.</u> |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| Property Controlling | S _____ T _____ R _____ | _____ |
| in Section | S _____ T _____ R _____ | _____ |
| Miscellaneous | S _____ T _____ R _____ | _____ |
| Property in Sec. | S _____ T _____ R _____ | _____ |

Register of Deeds Stamp & File Number

Lot No. _____, Recorded Plat _____
Private Claims _____

John P. Clapp in a field survey on November 14, 1994

whereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

| A | B | C | D | E | F | G | H | I | J | K | L | M |
|----|----|----|----|----|----|----|---|---|---|---|---|---|
| 2 | 6 | 5 | 4 | 3 | 2 | | | | | | | |
| 3 | | | | | | | | | | | | |
| 4 | 7 | 8 | 9 | 10 | 11 | 12 | | | | | | |
| 5 | | | | | | | | | | | | |
| 6 | 18 | 17 | 16 | 15 | 14 | 13 | | | | | | |
| 7 | | | | | | | | | | | | |
| 8 | 19 | 20 | 21 | 22 | 23 | 24 | | | | | | |
| 9 | | | | | | | | | | | | |
| 10 | 30 | 29 | 28 | 27 | 26 | 25 | | | | | | |
| 11 | | | | | | | | | | | | |
| 12 | 31 | 32 | 33 | 34 | 35 | 36 | | | | | | |
| 13 | | | | | | | | | | | | |

Description of original monument and accessories and/or subsequent restoration:

M-8
Gov't Land Office Survey Notes
May 1832 - Surveyor, Calvin Britain
Post
4" Tamarack S51°W 9 links
3" Tamarack N31°W 13 links

M-8
Recorded in Liber 5
Page 79, Dec. 20, 1983
Set Cast Iron Monument
Street Sign SSE 84.20'
Power Pole SW 47.30'
Power Pole NW 57.90'
Power Pole SE 31.75'

M-8
Recorded in Liber 5
Page 307, March 18, 1988
Iron in Monument Box
Guy Pole SE 31.33'
Power Pole SW 47.72'
Power Pole NW 57.90'
Street Sign SE 45.68'
C/L Bridge S 30.00' ±
1" Iron S 34.95'

Description of corner evidence found and/or method applied in restoring or reestablishing corner:


M-8
Found cast iron monument and accepted it as a careful and faithful perpetuation of the position of the original corner
Found Nail & Tag in Power Pole AZ. 320° 57.93'
Found Nail & Tag in Power Pole AZ. 238° 47.66'
1" Iron Pipe AZ. 180° 34.99'

P.A. 345 OTTAWA COUNTY
PEER APPROVED 11/21/94

Harold P. Nedewell

Description of monument for corner and accessories established to perpetuate locating the position of the

M-8
Found Ottawa County Cast Iron Monument
O.C. Remon tag & nail in NE Face of Power Pole AZ. 320° 57.84'
O.C. Remon tag & nail in SE Face of Power Pole AZ. 238° 47.64'
O.C. Remon tag & nail in SW Face of Guy Pole AZ. 124° 31.47'
1" Iron Pipe AZ. 180° 34.99'

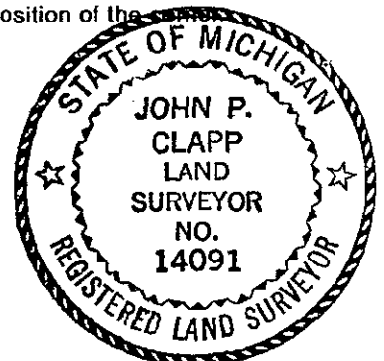

Signed by John P. Clapp *John P. Clapp* Date November 15, 1994
Surveyor's Michigan License No. 14091