

# SURVEY & REMONUMENTATION

FEB 27 1998

Ottawa County Remonumentation

## SECTION

### LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Ottawa</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>7N</u> R <u>13W</u>	<u>C-3</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

RECORDED  
97 DEC -8 AM 11:28

*Sam D. Hillman*  
REGISTER OF DEEDS  
OTTAWA COUNTY, MI

Register of Deeds Stamp & File Number

I, Maurice J. Rosema, in a field survey on Dec. 31, 1995 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

C-3			
G.L.O. by R. Whitcomb	L.C.R.C. rec. in Liber 3, Page 353		
in 1838	3/4" iron		
Set post	P. pole	SW 38.44'	
15" Elm	N13°E 13 lks	T. pole	NE 49.40'
12" Sugar	S31°W 32 lks	Trans pole	SE 58.05'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-3  
Found C.I. monument in gravel road 0.5' below grade  
Found nail in W side P. pole S50°W 39.25'  
Found nail in SW side P. pole S34°E 58.46'


I hereby accept this corner as a correct and accurate perpetuation of the position of the original corner.

P.A. 345 OTTAWA COUNTY  
PEER APPROVED 9-16-96

*YDZ*

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-3		
C.I. monument		
Set nail and remon tag in W side P. pole	S50°W 39.25'	
Set nail and remon tag in SW side P pole	S34°E 58.46'	
Top of SW corner of power box	N47°W 53.30'	
Center of base of street sign	N60°E 41.70'	
Center of base of stop sign	N22°W 46.90'	

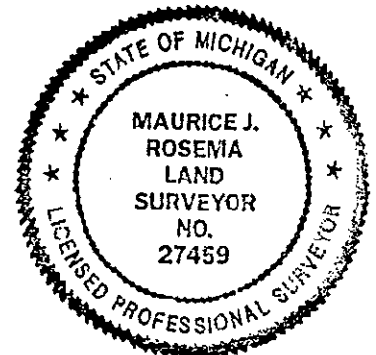

\$ 1.00 PHOTO

Signed by *Maurice J. Rosema*  
Surveyor's Michigan License No. 27459

Date September 16, 1996