

1022

RECORDED

93 DEC 15 AM 9:27

Ottawa County remonumentation  
**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

*Robert J. Chalmers*  
REGISTER OF DEEDS  
OTTAWA COUNTY, MI

For corners in  
Ottawa

(County)	Located In:	Corner Code #
1. Public Land Survey	T <u>7N</u> R <u>14W</u>	<u>L-11</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Maurice J. Rosema, in a field survey on July 27, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	N
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	13	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

- |      |   |  |
|------|---|--|
| L-11 | Clapp - 1972 per L.C.R.C. recorded in Liber 1, Page 797 | Joiner - 1989 per L.C.R.C. recorded in Liber 5, Page 366 |
|      | T iron fence post                                       | C.I.M.   |
|      | 24" Maple - SSW 126.87'                                 | Nail in Sw face fence post - NW 42.10'                   |
|      | 9" fence post - NW 41.82'                               | Chisled X cut in vulvert - SW 48.38'                     |
|      | 30" Maple - ENE 118.29'                                 | Nail in SW face P. pole - SE 56.74'                      |
|      | centerline Street sign - SE 39.96'                      | Nail in W face Triple ? - NE 90.00'                      |
|      | P. pole - SE 56.30'                                     | P.K. nail in top of fence post - NW 42.00'               |
|      | T. pole - SE 62.54'                                     |  |


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- L-11 Found C.I. monument in gravel road 0.4' below surface  
Found nail in Sw side fence post - N51°W 42.11'  
Found nail in W side P. pole - S50°E 56.37'

I hereby accept this corner as a correct and accurate perpetuation of the position of the original section corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- L-11 C.I. monument  
Centerline of base of street sign - S42°E 43.92'  
Set nail and O.C. remon. tag in top of T. box post - S49°W 51.10'  
Set nail and O.C. remon. tag in SW side fence post - N51°W 42.11'  
Set nail and O.C. remon. tag in W side P. pole - S50°E 56.37'  
Set nail and O.C. remon. tag in E side P. pole - N6°W 183.77'

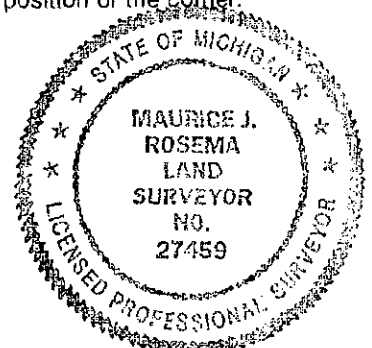

Signed by *Maurice J. Rosema*  
Maurice J. Rosema - Pru-Line Surveying  
Surveyor's Michigan License No. 27459

Date September 3, 1993