

SURVEY & REMONUMENTATION

AUG 20 1996

COMMISSION

Ottawa County Remonumentation

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC 15 AM 11:53

Phyllis Anderson
REGISTER OF DEEDS
OTTAWA COUNTY, MI

For corners in

<u>Ottawa</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>7N</u> R <u>14W</u>	<u>I-12</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	<u>Seg #2</u>
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

Maurice J. Rosema Oct. 15 94

I, _____, in a field survey on _____, 19 _____, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
-12

- | | | |
|--|---|---|
| LO - 1832 by
oah Brookfield for
alvin Britian D.S.
" Ash - N43° W .19 ch.
" Beech - S59° E .19 ch. | Spicer - 1972 per L.C.R.C.
rec. in L. 1, P. 817 (over) | Joiner - 1981 per L.C.R.C.
rec. in L. 4, P. 193 (over) |
| | Rosema - 1984 per L.C.R.C.
rec. in L. 5, P. 162A
(over) | Rosema - 1993 per L.C.R.C.
rec. in remon. L. 1, P. 204
(over) |


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
-12

ound C.I. mon. prior to road constuction, C.I. mon. was removed during construction,
laced 3/4" x 3" steel rod with std. remon. cap
ound Nail in W. side 30" Maple - S30° E 49.38'
ound nail in S. side 38" Box Elder - N70° E 38.04'
ound nail in E. side Power pole - N15° W 83.21'
ound P.K. nail in N. side 15" Pine - N83° W 43.10'
hereby accept this corner as a correct and accurate
erpetuation of the position of the original corner.

P.A. 345 OTTAWA COUNTY
PEER APPROVED 12/12/94
Phyllis Anderson

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
-12

- 3/4" x 3" steel rod with std. remon. cap
- set nail and remon. tag in S. side 30" Box Elder - N70° E 38.09'
- set nail and remon. tag in W. side 31" Maple - S19° E 71.13'
- set nail and remon. tag in E. side Power pole - N15° W 83.21'
- set nail and remon. tag in N. side 15" Pine - N83° W 43.10'
- set nail and remon. tag in W. side 30" Maple - S30° E 49.38'
- set nail and remon. tag in N. side 8" W. Cherry - S67° W 40.49'
- E. house cor. (cor. of siding) - N55° W 98.16'

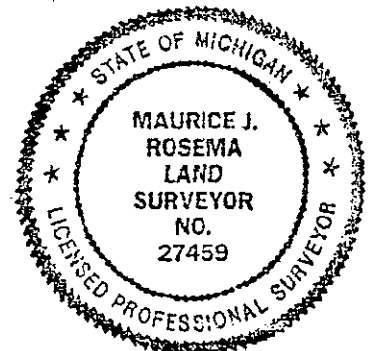

Dec. 10, 1994

Signed by *Maurice J. Rosema* Date _____
Surveyor's Michigan License No. 27459