

**SURVEY & REMONUMENTATION**

APR 24 1995

**COMMISSION**

**OTTAWA COUNTY REMONUMENTATION  
LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970**

**RECORDED**

94 DEC 14 AM 9:41


*Polycris Williams*  
REGISTER OF DEEDS  
OTTAWA COUNTY, MI

For corners in

Ottawa (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>8N</u> R <u>13W</u>	G-4 (W $\frac{1}{4}$ , 10) Wright Twp.
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

**Register of Deeds Stamp & File Number**

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

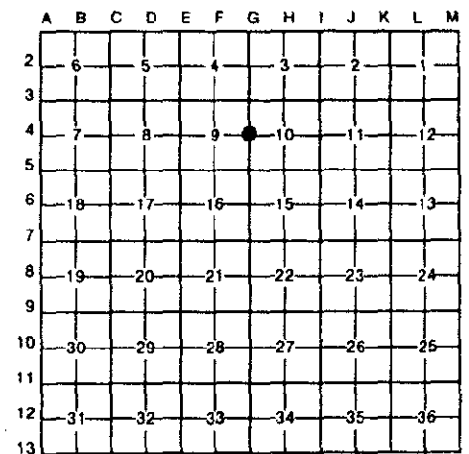

I, Donald W. Schiele, in a field survey on December 8, 19 94  
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
G-4  $\frac{1}{4}$  corner common to Sections 9 & 10, Wright Twp.  
Original Government Corner Record: L.C.R.C. recorded in Liber 1, Page 391, 5-11-72  
Set qr sec post between Sec. 9 & 10 Found Spike in C/L of pvmt. on fence line to West  
Post from County ties.  
Beech 20 S60E 16 NE Hse. Cor. SW 86.98'  
Do 18 N62W 12 SW Hse. Cor. NE 135.10'  
Enoch Hammele, Deputy Surveyor Nail in face of Tel. Pole NW 40.00'  
Between 9-18 and 9-26, 1838 Nail in face of Tel. Pole NE 60.55'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
G-4 Found 3/4" i.d. X 12" Iron Pipe, 1 1/2" below surface in Monument Box, and accepted as a careful and faithful perpetuation of the position of the original corner.  
SW corner, foundation to House # 18012 N49°E 135.09'  
Found nail & Tag # 16042 in SW side of Power Pole N58°30'E 60.49'  
Found nail & Tag # 18435 in SW side of Power Pole N58°30'E 60.50'  
Found PK nail in SE side of Power Pole N58°30'E 60.84'  
Found nail in SE side of Power Pole N58°30'E 60.86'  
NE corner, foundation to House # 17997 (undergoing renovation) S78°W 86.94'  
Found nail & Tag # 16042 in SE side of Power Pole N59°W 39.92'  
Found PK nail in SW side of Power Pole N59°W 40.38'

*Arden P. Nedewell* PA. 345 OTTAWA COUNTY  
DEED APPROVED 12/12/94

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
G-4 Removed 3/4" i.d. X 12" Iron Pipe and replaced with 3/4" X 24" Steel Bar with Ottawa County Remon Cap, 2" below surface in Monument Box.  
SW corner, foundation to House # 18012 N49°E 135.09'  
Set Ottawa County Remon Tag & nail in SE side of Power Pole N58°30'E 60.82'  
Set Ottawa County Remon Tag & nail in South side of 6" Ash S76°30'E 37.99'  
Set Ottawa County Remon Tag & nail in SE side of 26" Maple S34°30'W 62.51'  
Set Ottawa County Remon Tag & nail in SW side of Power Pole N59°W 40.29'  
Centerline asphalt road North & South, 0.4' West  
On occupation lines East & West, ±

Signed by Donald W. Schiele  
Surveyor's Michigan License No. 23517

Date DEC. 13, 1994

