

**SURVEY &
REMONUMENTATION**

APR 24 1995

OTTAWA COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

94 DEC 15 AM 11:52

For corners in
Ottawa
(County)
COMMISSION

Located In: Corner Code #

- | | | |
|---------------------------------------|-------------------------|---------------|
| 1. Public Land Survey | T 8N R 13W | I-11 (NW, 35) |
| | T _____ R _____ | Wright Twp. |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling
in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous
Property in Sec. | S _____ T _____ R _____ | _____ |


Phyllis Holman
REGISTER OF DEEDS
OTTAWA COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Donald W. Schiele, in a field survey on November 29, 19 94,
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned
in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the
current manual of survey instructions of the United States Department of the Interior, Bureau of Land
Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5
above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a
Court of Law; established, re-established, monumented, re-monumented, recovered, found as
expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded
on this certificate.**

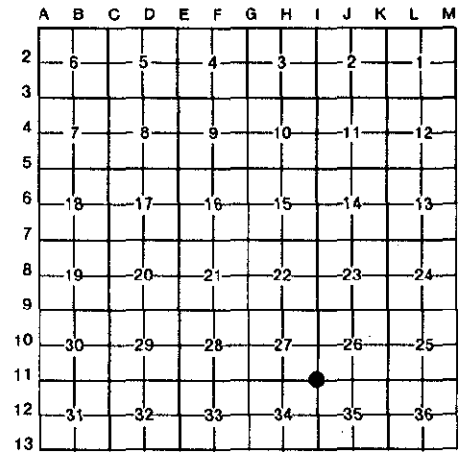

A. Description of original monument and accessories and/or subsequent restoration:
I-11 corner common to Sections 26, 27, 34 & 35, Wright Twp.
Original Government L.C.R.C. recorded in Liber 2,
Corner Record: Page 129, 5-7-73
Set corner post to Sec. 1/2" Pipe
26, 27, 34, 35 E. 2.9' St. Sign
Post S.S.E. 49.91' Guy Pole
Beech 20 N51E 17 S.E. 10.40' T.P.
Do 14 S41W 49 N.E. 83.96' R.R. Spike in P.P.
Enoch Hammele, Deputy Surveyor
Between 9-18 adn 9-26, 1838

L.C.R.C. recorded in Liber 2,
Page 824, 10-20-75
Iron Pipe
C/L St. Sign E 2.89"
Guy Pole SSE 49.95'
MBT Pole NE 84.50'

(SEE REVERSE)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
I-11 Found Cast Iron Monument inscribed "Ottawa County Section Corner", 5" below surface, and
accepted as a careful and faithful perpetuation of the position of the original corner.
Found railroad spike in SW side of Power Pole N56°E 83.98'
Found PK nail in SE side of Power Pole N56°E 84.47'
Centerline Street Sign S88°E 2.92'
Found nail in North side of Light Pole S14°E 49.91'
Found PK nail in East side of Light Pole S14°E 50.27'
Found PK nail in East side of Light Pole S14°E 50.24'
Found nail in NE side of 30" Maple cluster N35°W 68.28'



C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
I-11 Cast Iron Monument inscribed "Ottawa County Section Corner", 5" below surface.
Set Ottawa County Remon Tag & nail in SE side of Power Pole N56°E 84.44'
Set Ottawa County Remon Tag & nail in East side of Light Pole S14°E 50.24'
Set Ottawa County Remon Tag & nail in South side of Power Pole N88°30'W 103.66'
Set Ottawa County Remon Tag & nail in NE side of 30" Maple cluster N35°W 68.36'
Centerline asphalt road to North, extended South, 2' East
Centerline asphalt road to East, extended West, 1' North

P.A. 345 OTTAWA COUNTY
PEER APPROVED 12/12/94
Phyllis Holman
Date DEC. 13, 1994

Signed by Donald W. Schiele
Surveyor's Michigan License No. 23517

PART A. continued:

L.C.R.C. recorded in Liber 3, Page 17, 12-11-75

I-11 Found 1/2" round iron
Nail in guy pole SSE 50.25'
Nail in P. pole NE 84.48'
Nail in T. pole ESE 108.96'
Centerline street sign E 2.9'

L.C.R.C. recorded in Liber 3, Page 50, 3-29-76

I-11
Set cast iron Mon.
Guy pole SSE 49.95'
P. pole NE 84.50'
C/L St. sign E 2.89'

Handwritten notes and scribbles at the bottom of the page, including what appears to be a signature and some illegible markings.

120 #
2.00
1.50 #
2.40
051