OTTAWA COUNTY REMONUMENTATION

RECORDED

93 DEC 15 AM 9:31

REGISTER OF DEEDS
OTTAWA COUNTY, MI

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in Ottawa (County)

Located In: Crockery Township

Corner Code #

1. Public Land Survey — T 8N R 15W — M-10; T ___ R ___ — E¼ Corner; T ___ R ___ — Section 25; T ___ R ___
2. Property Controlling in Section — S ___ T ___ R ___; S ___ T ___ R ___
3. Miscellaneous Property in Sec. — S ___ T ___ R ___; S ___ T ___ R ___

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

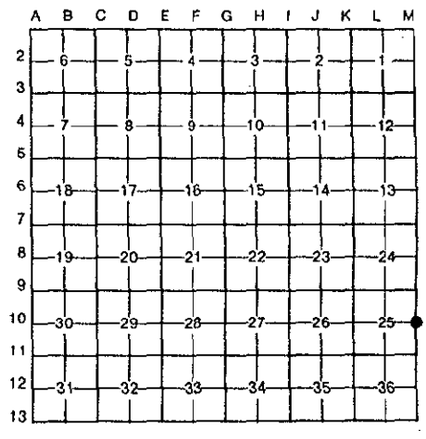

I, Carl P. Englert Jr., in a field survey on August 5, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

M-10
L.C.R.C., Liber 4, Page 106, (10-14-1980)
Fd. 1" iron pipe from old ties, Set C.I.M.
15" Pine, NW 80.80'
28" Maple, WNW 27.40'
P.P., SW 83.65'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

M-10
Found 4" Harrison monument with broken top in centerline of gravel road and accepted as a careful and faithful perpetuation of the position of the original corner.

30" Maple, WNW 27.40'
P.P., SW 83.65'
15" Pine, NW 80.80'

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-10 Replaced broken Harrison monument with 3' long 3/4" iron bar & O.C. Remon. Cap
O.C. Remon. Tag & Nail in East side 30" Butternut, N 7 degrees W 206.77'
O.C. Remon. Tag & Nail in NE side 14" Red Pine, N 27 degrees W 88.21'
O.C. Remon. Tag & Nail in NE side 30" Maple, N 72 degrees W 26.99'
O.C. Remon. Tag & Nail in E side P.P., S 50 degrees W 83.78'

(EDM)

STATE OF MICHIGAN
CARL P. ENGLERT JR. LAND SURVEYOR No. 18987
REGISTERED LAND SURVEYOR

Signed by Carl P. Englert Jr. Date December 3, 1993

Surveyor's Michigan License No. 18987

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983