

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
Ontonagon County Remonumentation Corner

Ontonagon County

Page 1 of 1

LC

5/120


Rec. Date 08/03/98 Time 09:12

RECORDING FEE:

9.00

For corners in

Table with columns: Ontonagon County, Located in:, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, Miscellaneous Property in Sec., Lot No., and Private Claims.

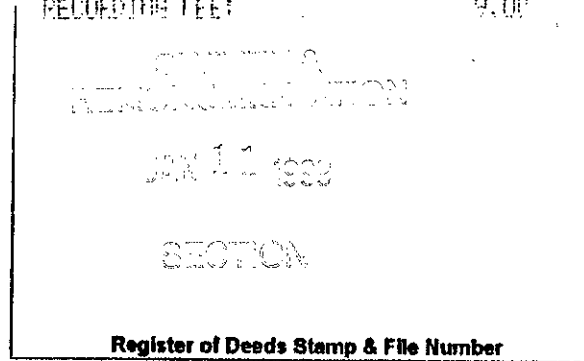

I, Joseph C. Domitrovich, in a field survey on July 21, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

Grid table with columns A-M and rows 1-13. A dot is marked at the intersection of column G and row 5.

A. Description of original monument and accessories and/or subsequent restoration: (I-5) Corner Common to Sections 10, 11, 14 & 15, T47N, R38W

- 1851 - Zelotes B. Searls set a post
16" Spruce S 89° W 21 links
10" Cedar N 34° E 9 links

- 1958 - M.S.H.D., for M-28 Highway Plans, show a 2" iron pipe at this corner, 121.82' South of centerline.
Ties: Power pole N 65° E 54.20'
Power pole S 49° E 55.45'
Fence post S 77° W 80.39'

They also show a distance of 2634.74 feet North to the West 1/4 Corner of Section 11.

PEER GROUP APPROVAL
Carl W. Applbaum
COUNTY REPRESENTATIVE 7-22-98

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I found no remains of the original corner or accessories. The corner now falls in a paved intersection with farmed fields in all directions. I found a 1" mushroomed iron pin in a monument box 11 feet West of "South Mile West Road" and 60 feet South of present centerline of Michigan Highway M-28. None of the M.S.H.D. ties remain. Distance North to the 1/4 Corner works well with M.S.H.D. distance. This iron pin works well with other corners in the area. I accepted this pin as the Section Corner.


Research on file with County Remonumentation Representative.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner is a 1" mushroomed iron pin in a monument box with 2 reference monuments (R.M. 1 and R.M. 2) facing it. They are both 2 1/2" aluminum pipes with 3" diameter aluminum caps stamped: COUNTY REMONUMENTATION; R.M.; T.47N, R.38W; S.10, S.11, S.14, S.15; 1998; P.S. 37273. The reference monuments are also stamped with arrows and bearings and distances to the Section Corner. Steel Sign Rails are placed behind the reference monuments.

Witnesses:

Table with columns: Witness, Bearing, Distance. Includes Power Pole, R.M. 1, Transformer Pole, R.M. 2, NGS Benchmark, S 1/4 Cor. Sec. 11, W 1/4 Cor. Sec. 11, W 1/4 Cor. Sec. 14.

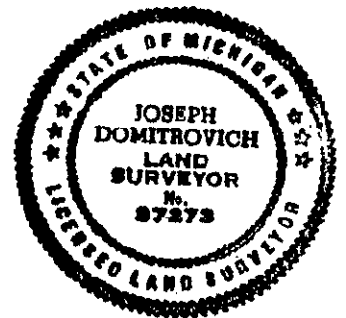

NOTE: Bearings to witness objects are magnetic. Distances are to a nail in side of the witness object unless noted.

Signed by J.C. Domitrovich

Date 7/22/98

Surveyor's Michigan License No. 37273