

DEC 16 1996


COMMISSION

JUDITH D. ROEHM
Ontonagon County
LC 4/100 JEM Fee: 9.00
07/11/96 08:48
Page 1 of 1

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

ONTONAGON (County)	Located In:	Corner Code #
1. Public Land Survey	T48N R 40W	K-12
	T___ R___	_____
	T___ R___	_____
	T___ R___	_____
2. Property Controlling In Section	S___ T___ R___	_____
	S___ T___ R___	_____
3. Miscellaneous Property in Sec.	S___ T___ R___	_____
	S___ T___ R___	_____

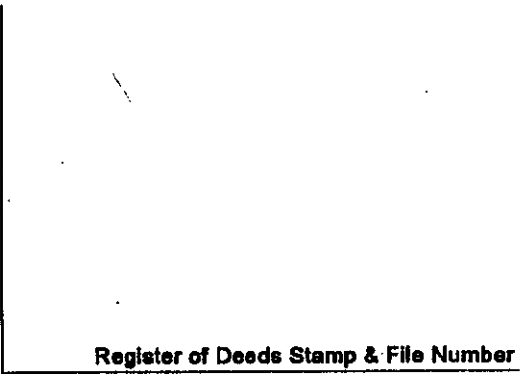

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

1/4 Corner common to Sections 35 & 36, T48N R40W.

I, Earl W. Applekamp, in a field survey on June 20, 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

A. Description of original monument and accessories and/or subsequent restoration:

Original corner established by Wells Burt, U.S. Deputy Surveyor, May 26, 1851. Set Wood Post.

ORIGINAL BEARING TREES:

W. Pine 26" S64°E 16 links
W. Pine 18" S18°W 48 links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

No original evidence was found. Corner was re-established by single proportionate measurement and on line with opposite section corners. Corner position falls 1.5 feet West of the centerline of the Choate Road. There is an old fence running West from the corner.


Research on file with the Ontonagon County Remonumentation Program Representative.

PEER GROUP APPROVED
Earl W. Applekamp
COUNTY REPRESENTATIVE
7-08-96

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

At the corner position I set a 5/8"x24" rebar with a 3/4" cap 2" below top of blacktop. Cap is stamped to read: County Remonumentation, 1/4, T48N R40W, S35, S36, 1996, P.S. 17610. I established one reference monument, a 2 1/2"x30 aluminum pipe with a 3/4" stamped cap and 3 other bearing objects.

REF. MON. N79°-24'-06"E 37.35' - 6" Aspen S71°-30'-38"W 83.96'
REA P. Pole N36°-02'-44"W 56.78' - 5" Aspen S44°-59'-00"E 56.66'

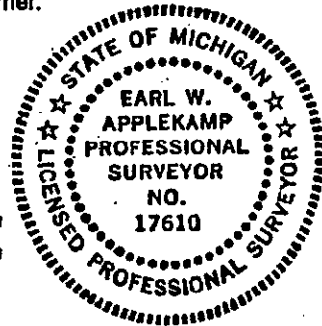

Signed by Earl W. Applekamp
Surveyor's Michigan License No. 17610

Date June 27, 1996