

DEC 16 1996


COMMISSION

JUDITH D. ROEHN
 Ontonagon County
 LC 4/ 52 JEM Fee: 9.00
 Page 1 of 1

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>ONTONAGON</u> (County)	Located in:	Corner Code #
1. Public Land Survey	T <u>48N</u> R <u>40W</u>	<u>L-9</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

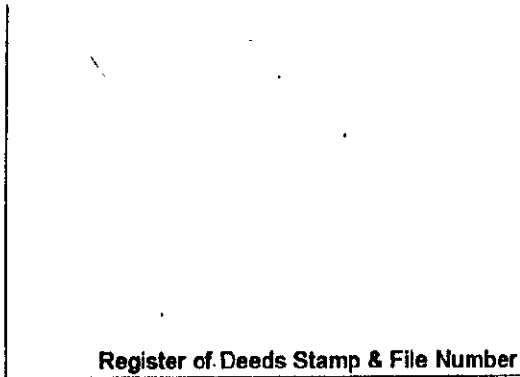

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

1/4 Corner common to Sections 24 & 25, T48N R40W.

I, Earl W. Applekamp, in a field survey on April 21 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners; all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

Original corner established by J. Wells Burt, U.S. Deputy Surveyor, May 27, 1851. Set Wood Post.

ORIGINAL BEARING TREES:

White Pine 18" S65°E 14 links
 White Pine 36" N42°W 31 links

PEER GROUP APPROVED
Earl W. Applekamp 5-07-96
 COUNTY REPRESENTATIVE

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

No original evidence was found. No subsequent evidence was found, except there is a fence line running North. This separates a woods line from a field. This fence line is in conformance with the restored position of the 1/4 Corner. Corner will be established by single proportionate measurement between opposite section corners.

Research on file with the Ontonagon County Remonumentation Representative.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

At the corner position I set a PK nail in a 1" washer in the centerline of the East bound lane of Michigan Highway M-28. I established two reference monuments, each a 2 1/2" X 30" aluminum pipe with a 3 1/4" cap stamped to read: County Remonumentation, 1/4, R.M., S24, S25, 1996, P.S. 17610. I also established two other reference objects.

REF. MON. N03°-14'-16"W 59.39' 7" Aspen N36°-24'-42"W 85.53'
 REF. MON. S02°-53'-12"E 32.37' 7" W. Pine S24°-18'-53"E 86.61'



Signed by *Earl W. Applekamp*
 Surveyor's Michigan License No. 17610

Date May 3, 1996