

SURVEY & REMONUMENTATION

APR 29 1996


JUDITH D. ROEHM
 Ontonagon County
 LC 3/292 JEM Fee: 9.00
 08/09/95 13:48
 Page 1 of 1

COMMISSION LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in ONTONAGON Located In: _____ Corner Code # _____
 (County)

1. Public Land Survey	T	48	R	41	C-2	
	T	_____	R	_____	_____	
	T	_____	R	_____	_____	
	T	_____	R	_____	_____	
2. Property Controlling in Section	S	_____	T	_____	R	_____
	S	_____	T	_____	R	_____
3. Miscellaneous Property in Section	S	_____	T	_____	R	_____
	S	_____	T	_____	R	_____

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

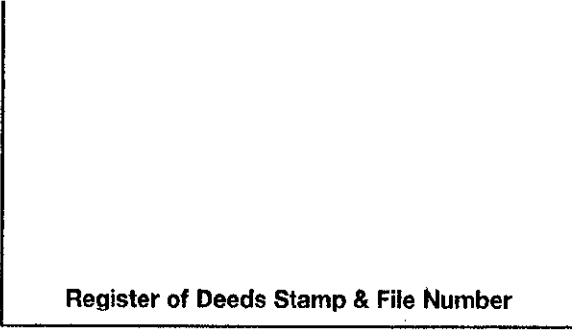

$\frac{1}{4}$ Section corner common to Sections 5 & 6 T48N R41W

I, Earl W. Applekamp in a field survey on June 27, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

A. Description of original monument and accessories and/or subsequent restoration:

Original corner established by Wills Burt, Deputy Surveyor, June 1857. A 12" diameter White Pine.

BEARING TREE:

Spruce 10" S55°W 5 Links (3.30 feet)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

No original evidence of the original corner was found. at the corner location a gravel road runs N & S. A clearing line and old fence line run East from the location, I set a corner on the centerline of the gravel road and proportionate measurement between the North and South Section corner. The monument is described below. This corner is one of 29 corners in 6 Sections remonumented under the County Remonumentation Program. Research is on file with the Ontonagon County Remonumentation Program Representative.

PEER GROUP APPROVED

Earl W. Applekamp 8-08-95


COUNTY REPRESENTATIVE

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

At the corner location I set a 3/4"x24" aluminum rod with a 3 1/4" cap below a gravel road. Cap is stamped to read: COUNTY REMONUMENTATION, $\frac{1}{4}$ Corner, S5, S6, T48N R41W, 1995, P.S. 17610. I established the following bearing trees and reference objects.

4" triple maple N66°W 62.44 feet REA power pole S25°E 58.75 feet

5" aspen S87°W 69.29 feet 2 1/2"x30" monument with a 3 1/2" cap W.C. West 36.79 feet

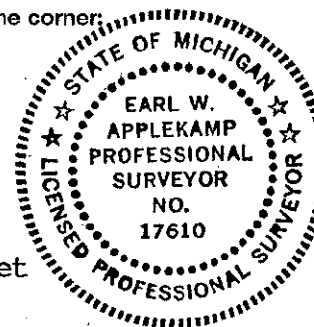

Signed by Earl W. Applekamp
 Surveyor's Michigan License No. 17610

Date July 12, 1995