


**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>ONTONAGON</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>50NR 42W</u>	<u>D-3</u>
	T ___ R ___	_____
	T ___ R ___	_____
	T ___ R ___	_____
2. Property Controlling in Section	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____
3. Miscellaneous Property in Sec.	S ___ T ___ R ___	_____
	S ___ T ___ R ___	_____

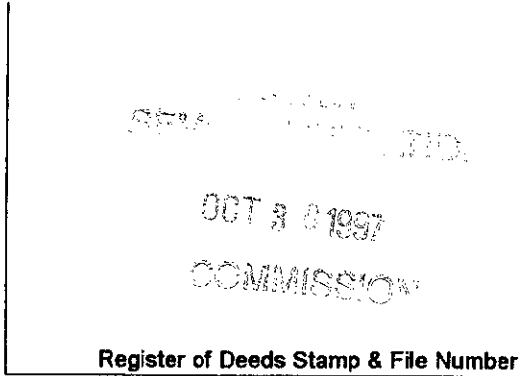

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

1/2 Corner common to Sections 5 & 8, T50N R42W.

I, Earl W. Applekamp, in a field survey on August 7, 19 97 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3			●									
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

A. Description of original monument and accessories and/or subsequent restoration:

Original corner established by Austin Burt, U.S. Deputy Surveyor, June 22, 1848. Set Cedar Post.

ORIGINAL BEARING TREES:

7" Maple S57°E 21.78 feet  
 12" Hemlock N56°W 15.84 feet

PEER GROUP APPROVED  
*Earl W. Applekamp*  
 COUNTY REPRESENTATIVE 9-17-97

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

No original evidence remains. Corner position is in a blacktop parking lot. This corner is identified in the Plat of White Pine which was recorded in 1960. The plat does not indicate the type of monument but does give bearing and distances to the corner. A parking lot was constructed since the plat was made and apparently destroyed any marker. This corner is also identified in the Plat of White Pine No. 1. I monumented the corner based on the information given on the two plats.

Research on file with the Ontonagon County Remonumentation Program Representative.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

At the corner position I set a 5/8"x12" rebar with a 3" cap 2" below top of blacktop in the White Pine High School parking lot. The cap is stamped to read: County Remonumentation, T50N R42W, 1/4, S5, S8, 1997, P.S. 17610. I established the following bearing objects.



SE Cor. Church S63°-33'-01"W 245.90' - NW Cor. H. School N07°-08'-24"E 187.93'  
 Plat Monument S89°-43'-20"W 383.15' - SW Cor. H. School S79°-21'-18"E 196.02'

Signed by Earl W. Applekamp  
 Surveyor's Michigan License No. 17610

Date September 15, 1997