


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970 of 1
Ontonagon County Remonumentation Center

LC 5/125
Date 08/03/98 Time 09:21
RECORDING FEE: 9.00

For corners in

Table with columns: Ontonagon County, Located in:, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, Miscellaneous Property in Sec., Lot No., and Private Claims.

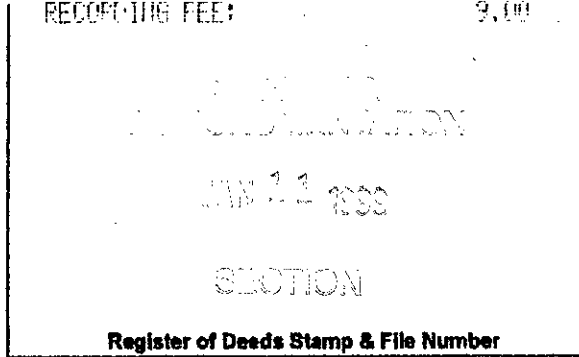

I, Joseph C. Domitrovich, in a field survey on July 3, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

(I-12) 1/4 Corner Common to Sections 34 & 35, T.51N, R.37W

1846 - Sylvester W. Higgins used 9" White Pine for corner post
9" White Pine N 70° W 8 links

I found no subsequent record.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I found no remains of the original corner or accessories. The area around the corner has been disturbed by North-South Van Damme Road. Van Damme Road runs generally North-South but does not follow the Section line and is not straight. I determined the Corner to be lost and re-established it by single proportionate measurement between Section Corners to the North and South.

Research on file with County Remonumentation Representative.

PEER GROUP APPROVAL
Signature of Paul W. [unclear]
DATE APPROVED 7-22-98

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner is a 2 1/2" x 30" aluminum pipe with a 3" diameter aluminum cap stamped to read: COUNTY REMONUMENTATION; S.34, S.35; 1/4; T.51N, R.37W; 1998; P.S. 37273. The corner falls on Easterly edge of seasonal Van Damme Road.

Witnesses:

Table with columns: Witness, Bearing, Distance. Includes 15" White Pine, 8" Balsam, SE Cor. Log Cabin, Power Pole, Steel Sign Post, NW Cor. Section 35, SW Cor. Section 35.

(measured to corner of tin foundation)

NOTE: Bearings to witness objects are magnetic. Distances are to a nail in side of the witness object unless noted.

Signed by J.C. Domitrovich

Date 7/22/98

Surveyor's Michigan License No. 37273

