


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
Ontonagon County Remonumentation Corner

REC. Date 08-03-98 Time 09:22
RECORDING FEE: 9.00

For corners in

Table with columns: Ontonagon County, Located in:, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, Miscellaneous Property in Sec., Lot No., and Private Claims.

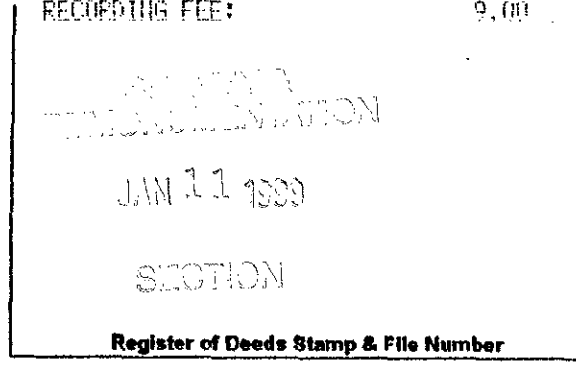

Grid table with columns A-M and rows 1-13. A dot is marked at the intersection of column J and row 11.

I, Joseph C. Domitrovich, in a field survey on July 9, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefor as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

(K-11) Corner Common to Sections 25, 26, 35 & 36, T51N, R37W

1846 - Sylvester W. Higgins set post
20" Y. Birch N 60° W 22 links
18" Sugar S 55° E 39 links

1976 - Keith L. Sackett, R.L.S. 19006 for Michigan Department of Natural Resources, re-established this corner by double proportionate measurement. He set a 1" I.D. x 36" iron pipe with a 4" aluminum cap on a North-South fenceline. This corner is recorded in the Ontonagon County Register of Deeds Office, Liber 1, Page 55 of Corner Records. He established 3 NBTs: 9" Y. Birch S 51° W 6.5', 6" Maple S 52° E 5.4', 7" Ash N 55° W 9.3'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I found no remains of the original corner or accessories. I recovered the corner re-established by Sackett, as well as his 3 NBTs. It falls in the North-south fenceline as mentioned by Sackett. Interior 1/16 fences in the Section work reasonably well with this position. This corner has been used and accepted by surveyors and land owners for over 20 years. Therefore I have accepted it as the Northeast Corner of Section 35.

Research on file with County Remonumentation Representative.


PEER GROUP APPROVAL
Signature: Carl W. Applebaum
COURT ESTABLISHED 7-22-98

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Corner is a 1" I.D. x 36" iron pipe with a 4" diameter aluminum cap stamped to read: MICHIGAN DEPT. OF NATURAL RESOURCES; 26, 25, 35, 36; T51N, R37W; 7/22/76; RLS 19006.

Witnesses:

Table with columns: Witness, Bearing, Distance. Includes 12" Y. Birch, 7" Soft Maple, 12" Y. Birch, 8" Ash, Steel Sign Rail, E 1/4 Cor. Section 35, N 1/4 Cor. Section 35.

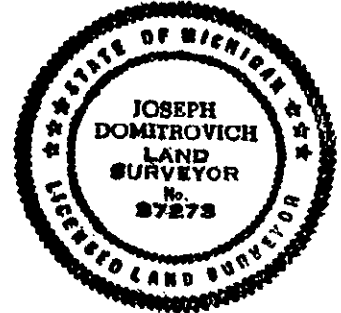

NOTE: Bearings to witness objects are magnetic. Distances are to a nail in side of the witness object unless noted.

Signed by J.C. Domitrovich

Date 7/22/98

Surveyor's Michigan License No. 37273