

DEC 1 8 1996

**COMMISSION**

JUDITH D. ROEHM  
 Ontonagon County  
 LC 4/ 80 JEM Fee: 9.00  
 Page 1 of 1


**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in Ontonagon (County) Located In: \_\_\_\_\_ Corner Code # \_\_\_\_\_

1. Public Land Survey	T <u>51N</u> R <u>39W</u>	<u>L-13</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_

5. Private Claims \_\_\_\_\_

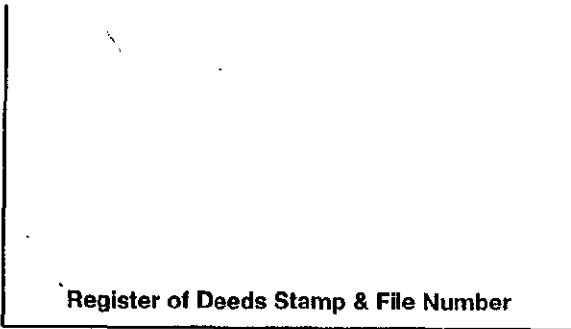

I, Joseph C. Domitrovich, in a field survey on June 5, 1996, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

**A. Description of original monument and accessories and/or subsequent restoration:**

(L-13) South 1/4 Corner Section 36, T51N, R39W

1845 - Austin Burt set post  
 12" Birch N 68° E 22 links  
 6" Sugar N 60° W 09 links

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2			
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

John Myllylahti properly owner to north showed me this corner which he had witnessed by driving two metal fencepost marked: "35' NE to COR." and "35' NW to COR." Found A 3/4" X 2" iron bar driven over old drill steel at the intersection of the distances marked on the fenceposts. Mr. Myllylahti stated that this corner was here when his father purchased his farm in the early 1900's.

This corner works well with standard and closing corners to the east and west.

PEER GROUP APPROVED  
*Earl W. Applekamp*  
 COUNTY REPRESENTATIVE 6-06-96

Research on file with County Remonumentation Representative.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

Corner is a 5/8" x 24" rebar driven over the found 3/4" x 2" bar and is capped by a 3" diameter aluminum cap stamped to read: T.51N., R39W.; 1/4 S.36; 1996; P.S. 37273. Corner falls 3' south of centerline of gravel road. Also set a Reference Monument (R.M.), a 2" x 30" aluminum pipe with 3" diameter aluminum cap stamped to indicate 1/4 corner is north 21.13'.

**Witnesses:**

R.M.	South	21.13'
12" Spruce	S 13° W	19.28'
12" White Ash	S 40° W	59.99'
8" Oak	S 50° E	31.14'
Steel Sign Post	South	21.94'

**NOTE:** Bearings are magnetic. Distances are to nail in side of witness objects unless noted.

Signed by Joseph C. Domitrovich

Date 6/5/96

Surveyor's Michigan License No. 37273

