APPROVED BY PEER GROUP
P.A. 345 OF 1990
SAGINAW COUNTY
8-20-96

LIBER 1986 PAGE 474

SAGINAW COUNTY REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED & FILED
SEP 27 11 42 AM 1996
MILDRED M. DODAK
REGISTER OF DEEDS
SAGINAW COUNTY MICH.

Liber 7 Page 64
Register of Deeds Stamp & File Number

For corners in

Saginaw (County) Located in: City of Saginaw Corner Code #

1. Public Land Survey T 12N R 4E I-7
   T R
2. Property Controlling S T R
   in Section S T R
3. Miscellaneous S T R
   Property in Sec. S T R

4. Lot No._____, Recorded Plat_____
5. Private Claims_____

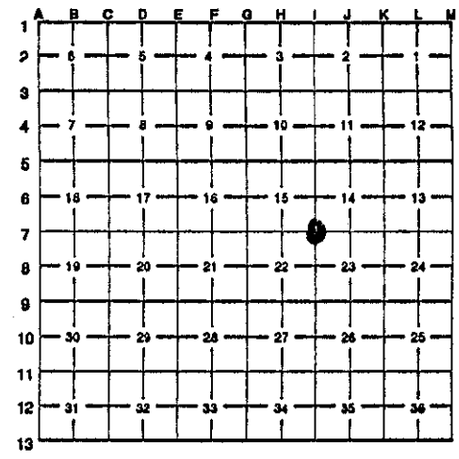

I, Brian D Ferguson, in a field survey on September 3, 19 96 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

I-7 Wood post set by Wampler, 1822.
LCRC L. 3, Pg. 93.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I-7 Found 2" city marker in monument box.
Position agrees with City of Saginaw re-survey map.
No recorded surveys.
No recorded plats.
Accepted by peer group as best available evidence of original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I-7 Epoxy Saginaw County Remon. cap to 2" city marker in monument box.

S50°E	61.13	Top ctr. hyd.
S70°W	49.00	N & S N face power pole.
N40°W	57.30	N & S NE face power pole.
N50°E	45.28	N & S SE face power / light pole.

STATE OF MICHIGAN
BRIAN D FERGUSON
LAND SURVEYOR
NO. 26454
PROFESSIONAL SURVEYOR

Signed by B D Ferguson Date 9-27-96

Surveyor's Michigan License No. 26454

REMONU
MAY 1 3 1997
COMM

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995