

LAND CORNER RECORDATION CERTIFICATE

NOV 19 1993

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

COMMISSION

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____ T. <u>10</u> N. <u>13</u> E. <u>13</u>		B - 1, C - 1
2. PROPERTY CONTROLLING IN SECTION _____, T. _____ N. _____ S. _____ R. _____ E. _____ W. _____		
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____ N. _____ S. _____ R. _____ E. _____ W. _____		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

RECEIVED FOR RECORD

93 NOV -4 AM 11:54

LIBER NO. 1 PAGE NO. 378  
ESTHER LEE  
REGISTER OF DEEDS  
SANILAC CO., MICHIGAN

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, John A Milletics, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on July 12, 1993, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_, 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B - 1 Found R/R Spike in Blacktop as recorded in Liber 4 Page 501 of the Sanilac County Records

C - 1 Found P.K. nail in Blacktop as recorded in Liber 4 Page 76 of the Sanilac County Records.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

B - 1  
N 1/4 Cor Section 6 T10N-R13E  
Found R/R spike

C - 1  
NE Cor Section 6 T10N-R13E  
Found P.K. nail

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

B - 1  
N 1/4 Cor Section 6 T10N-R13E  
Monu Box Set  
West 13.00' to the S 1/4 Cor Sec 36 T11N-R12E  
N45°W 142.90' to a nail in a Power Pole  
South 51.65' to a nail in a Double Poplar

C - 1  
NE Cor Section 6 T10N-R13E  
Monu Box Set  
West 10.88' to the SW Cor Section 31 T11N-R13E  
North 56.8' to a nail in a Power Pole  
N45°W 78.23' to a nail in a Power Pole  
S45°W 68.90' to a nail in a 24" Poplar


SIGNED BY [Signature] DATE Nov 4, 1993

SURVEYOR'S MICHIGAN REGISTRATION NO. 25859

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_  
CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_  
MICHIGAN REGISTERED LAND SURVEYOR

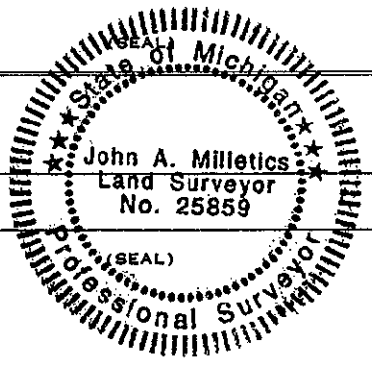

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_