

SURVEY & REMONUMENTATION

SEP 17 1999

LIBER 2 PAGE 296

RECEIVED FOR RECORD

99 AUG -2 AM 9:09

SECTION

1999 REMONUMENTATION PROGRAM
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

LIBER NO. 2 PAGE NO. 296
MICHELE VANORMAN
REGISTER OF DEEDS
SANILAC CO., MICHIGAN

For corners in

<u>SANILAC</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T11N R12E	A-6
	T R	
	T R	
	T R	
2. Property Controlling in Section	S T R	
	S T R	
3. Miscellaneous Property in Sec.	S T R	
	S T R	

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, John A. Millettics, in a field survey on April 1, 1999 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

A. Description of original monument and accessories and/or subsequent restoration:
1834 (Gov't. Land Office Notes) Harvey Parke, D.S.-Set Quarter Section post-Elm 17 S12W 15;
B. Ash 11 N17W 27
1974 (Survey-Liber 438, page 726) Robert G. Kay, P.S. 14096-set 1/2" iron-N40°W 68.75' Nail
Wood Post; N80°E 17.20' Nail 6" Maple; S35°W 49.20' Nail 28" Stump


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

A - 6
W 1/4 Corner Section 18 T11N-R12E
Found Standard Concrete Mounment with Brass Cap
North 2650.48 feet to NW Corner Section 18
South 2642.45 feet to SW Corner Section 18
Accepted as best evidence

APPROVED PEER BOARD MEETING
July 20, 1999

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Found Standard Concrete Monument W/2" Brass Cap
S35°E, 48.64' T.C. Remon. tag in SW face of 18" Elm
S08°E, 104.53' T.C. Remon. tag in NE face of 7" Elm
S22°W, 57.38' T.C. Remon. tag in West face of 8" Elm
West, 109.50' T.C. Remon. tag in North face of 16" Multi-trunk Elm

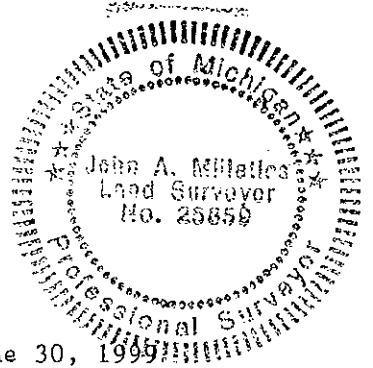

Signed by John A. Millettics
Surveyor's Michigan License No. 25859

Date June 30, 1999