

RECEIVED

ST. CLAIR COUNTY, MICHIGAN  
OFFICIAL GOVERNMENT CORNER

SEP 20 AM 2:23

REGISTERED  
ST. CLAIR COUNTY  
LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970



	Located In:	Corner Code #
	Kimball Township	
1. Public Land Survey	T <u>6N</u> R <u>16E</u>	<u>D-1</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	<u>Sec 1</u>
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_

5. Private Claims \_\_\_\_\_

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, John C. Niederhauser, in a field survey on March 15, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 1 corner, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

This corner was not set during original Government survey. Monument box listed on Old County Surveyor's Record, St. Clair County. Corner recovered and recorded by G. James, Liber 2, page 252, monument box listed on corner certificate. Corner re-recorded by D. Hooth, Liber 3, page 408. 1" rod in monument box listed on corner certificate.

STATE PLAIN COORDINATES

N. \_\_\_\_\_

E. \_\_\_\_\_

ELEVATION \_\_\_\_\_

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1/2" rered in monument box on existing centerline of Lapeer Road pavement in line with old fence to south. No previously recorded witnesses were found. Verified corner from recorded survey by B. Kreger, Liber 8, page 146 and from old Michigan Department of Transportation road plans. Also referenced unrecorded surveys by B. Kreger, C. McDaniel and M. Rossow.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

1/2" rered in monument box on existing centerline of Lapeer Road pavement in line with old fence to south. Located on the true Township line.


S 45°E 40.40' to set P.K. nail with county remon tag in N.E. side 12" ash tree  
 SOUTH 48.00' to set P.K. nail with county remon tag in W. side power pole  
 N 16°W 77.45' to set P.K. nail with county remon tag in E. 8" ash tree  
 N 45°E 30.52' to set P.K. nail with county remon tag in top of guard rail post.  
 WEST 2660.28' to N.W. corner of Section 5, T6N-R16E  
 EAST 2693.66' to N.E. corner of Section 5, T6N-R16E

Signed by [Signature]  
 John C. Niederhauser  
 Surveyor's Michigan License No. 24608

PA 345-1990  
 PEER COMMITTEE

Date May 19, 1994

APPROVED 6-17-94

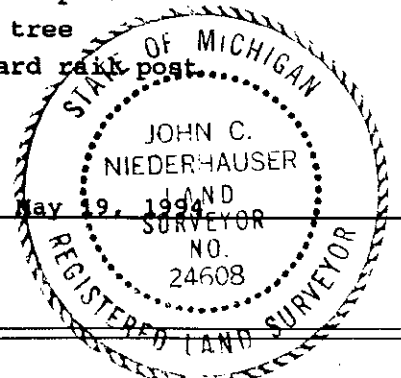

APPROVED AS AN OFFICIAL GOVERNMENT CORNER BY ST. CLAIR COUNTY:

Signed By: \_\_\_\_\_  
 St. Clair County Land Surveyor

\_\_\_\_\_ Date

Surveyor's Michigan License No. \_\_\_\_\_

LIBER 007 PAGE 360