

RECEIVED

ST. CLAIR COUNTY, MICHIGAN
OFFICIAL GOVERNMENT CORNER

1994 SEP 20 PM 2:23

RECEIVED
ST. CLAIR COUNTY

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970



Located In: Corner Code ##

Port Huron Township

| | | | |
|------------------------------------|-------------|---------------|------------|
| 1. Public Land Survey | T <u>6N</u> | R <u>R17E</u> | <u>C-1</u> |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| 2. Property Controlling in Section | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |
| 3. Miscellaneous Property in Sec. | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

| A | B | C | D | E | F | G | H | I | J | K | L | M |
|----|----|----|----|----|----|----|---|---|---|---|---|---|
| 2 | 6 | 5 | 4 | 3 | 2 | | | | | | | |
| 3 | | | | | | | | | | | | |
| 4 | 7 | 8 | 9 | 10 | 11 | 12 | | | | | | |
| 5 | | | | | | | | | | | | |
| 6 | 18 | 17 | 16 | 15 | 14 | 13 | | | | | | |
| 7 | | | | | | | | | | | | |
| 8 | 19 | 20 | 21 | 22 | 23 | 24 | | | | | | |
| 9 | | | | | | | | | | | | |
| 10 | 30 | 29 | 28 | 27 | 26 | 25 | | | | | | |
| 11 | | | | | | | | | | | | |
| 12 | 31 | 32 | 33 | 34 | 35 | 36 | | | | | | |
| 13 | | | | | | | | | | | | |

I, John C. Niederhauser, in a field survey on March 25, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 1 corner, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Corner marked on 3" hazel tree by William Preston in 1817.
Railroad spike listed on Old County Surveyor's Record, St. Clair County. Corner recovered and recorded by C. Alloway, Liber 2, page 350, railroad spike listed.
Corner re-recorded by G. James, Liber 5, page 125, railroad spike listed. 5/8" iron rod in monument box listed in St. Clair County Road Commission corner book, page 374.

STATE PLAIN COORDINATES

N. _____

E. _____

ELEVATION _____

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 5/8" iron rod in monument box, 1.0' north of centerline of existing West Water Street pavement and on centerline of existing Michigan Road pavement to south. Verified corner from previously recorded witnesses and from recorded surveys by: R. Kreger, Liber 7, page 267 and Liber 8, page 466; C. Mc Daniel, Liber 10, page 291 & Liber 11, page 306; C. Alloway, Liber 14, page 80. Also referenced unrecorded surveys by G. James, J. Niederhauser, G. Whitmore, T. Leach, B. Collins and W. Gaskins.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

5/8" iron rod in monument box, 1.0' north of centerline of existing West Water Street pavement and on centerline of existing Michigan Road pavement to south.
Located 1.13 feet north of the true Township line.

S 11°30'E 99.88' to set P.K. nail with county remon tag in W. side power pole
S 45°30'W 47.18' to set P.K. nail with county remon tag in S.E. side power pole
N 56°30'W 57.07' to set P.K. nail with county remon tag in N.E. side power pole
N 61°E 63.68' to set P.K. nail with county remon tag in S.W. side power pole
WEST 2666.17' to N 1/4 corner Section 6, T6N-R17E
EAST 2690.93' to N 1/4 corner Section 5, T6N-R17E

Signed by _____ Date May 25, 1994


John C. Niederhauser

PA 345-1990

Surveyor's Michigan License No. 24608

PEER COMMITTEE

APPROVED 6-17-94

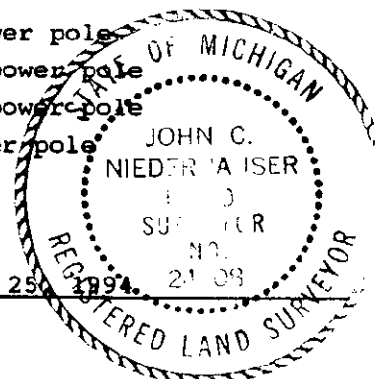

APPROVED AS AN OFFICIAL GOVERNMENT CORNER BY ST. CLAIR COUNTY:

Signed By: _____

St. Clair County Land Surveyor

Date

Surveyor's Michigan License No. _____