

RECEIVED ST. CLAIR COUNTY, MICHIGAN
OFFICIAL GOVERNMENT CORNER



SEP 20 PM 2:23

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

Located In: Clyde Township Corner Code # L-13

- | | | |
|------------------------------------|--------------------------|---------------|
| 1. Public Land Survey | T <u>7N</u> R <u>16E</u> | <u>L-13</u> |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling in Section | S _____ T _____ R _____ | <u>Sec. 1</u> |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous Property in Sec. | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, John C. Niederhauser, in a field survey on January 26, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 1 corner, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Wood post set by Joseph Wampler in 1822.
No other record of this corner could be found.

STATE PLAIN COORDINATES

N. _____

E. _____

ELEVATION _____

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Nothing was found at corner location, set P.K. nail with county remon tag on existing centerline of West Water pavement. Set corner on a straight line between the S.W. corner of Section 36, T7N-R16E and the S.E. corner of Section 36, T7N-R16E and exactly half way between S.W. corner of Section 36, T7N-R16E and the S.E. corner of Section 36, T7N-R16E.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

P.K. nail with county remon tag on existing centerline of West Water Street pavement. Located on the True Township line.


- N.W. 61.70' to set P.K. nail with county remon tag in S.W. side 12" ~~willow tree~~
- N.E. 56.22' to top center of fire hydrant
- S.W. 78.18' to chiseled "X" in base of light pole
- E.S.E. 163.23' to top center of fire hydrant
- WEST 2632.42' to S.W. corner of Section 36, T7N-R16E
- EAST 2632.42' to S.E. corner of Section 36, T7N-R16E

Signed by John C. Niederhauser

PA 345-1990 Date _____
PEER COMMITTEE

Surveyor's Michigan License No. 24608

APPROVED 6-24-94

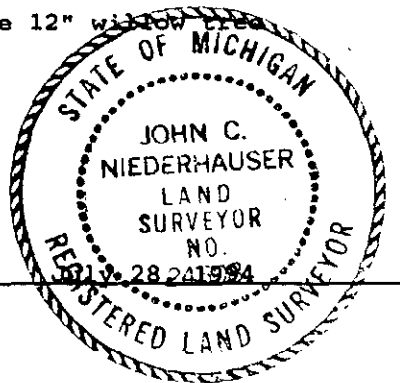

APPROVED AS AN OFFICIAL GOVERNMENT CORNER BY ST. CLAIR COUNTY:

Signed By: _____
St. Clair County Land Surveyor

Date

Surveyor's Michigan License No. _____