SCHOOLCRAFT COUNTY
PEER GROUP APPROVED
DATE 11/12/97 for

SURVEY & REMONUMENTATION

JAN 21 1998

SECTION

~~LAND~~ CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Schoolcraft (County) Located In: Corner Code #

1. Public Land Survey		T42N R16W	K-2
		T___ R___	
		T___ R___	
		T___ R___	
2. Property Controlling in Section	S___	T___ R___	
	S___	T___ R___	
3. Miscellaneous Property in Sec.	S___	T___ R___	
	S___	T___ R___	

Received & Filed this 23 day of Dec 1997 at 3:15 PM
Sigrid I. Hedberg
Schoolcraft Co. Reg. of Deeds

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

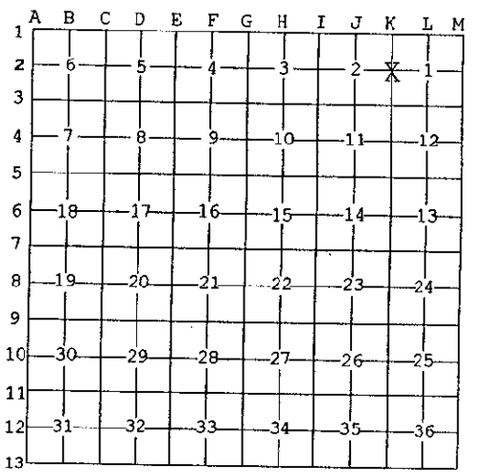

I, Thomas P. O'Brien, in a field survey on Dec. 1, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-2 West 1/4 Corner Section 1
Aug. 10, 1850 - Algernon Merryweather D.S. set qr. section post.
Cedar 12 in. N35W 32 links Do. 10 in. S44E 25 links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-2 Dec. 1, 1997 - Thomas P. O'Brien P.S. reestablished corner by single proportionate measurement between K1 and K3.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-2 1/2" iron bar with O'Brien cap # 21274 in Monument Box.

Witnesses: 10" Cedar - N41°E - 108.61'
12" Cedar - S50°E - 82.38'
14" Aspen - West - 71.20'
Pipe w/ MDOT station cap #75070 - N13°W - 102.48'
Carsonite Post - East - 50.0'

STATE OF MICHIGAN
THOMAS P. O'BRIEN PROFESSIONAL SURVEYOR NO. 21274
LICENSED PROFESSIONAL SURVEYOR

Signed by Thomas P. O'Brien P.S. Date December 19, 1997
Surveyor's Michigan License No. 21274

LIBER 4 PAGE 161

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995