

# LAND CORNER RECORDATION CERTIFICATE

## FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>22</u> T. <u>15</u> N. R. <u>8</u> E.		I-9, H-9
2. PROPERTY CONTROLLING IN SECTION _____, T. _____, N. S., R. _____, E. W.		
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____, N. S., R. _____, E. W.		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

77  
6

I, Thomas G. Moran, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on October, 1979, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_, 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

- A. Description of original monument and accessories and/or subsequent restoration:
- I-9 Corner restored by R. Black 1" iron pipe.
  - H-9 Corner recovered by D. E. Cranston January 27, 1870. Cedar post surrounded by stones.
- B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
- I-9 Found 1" iron pipe as set by R. Black. Set plastic cap in 1" pipe and lowered pipe to 6" below surface.
  - H-9 Found: Cedar post surrounded by stones. Set 4"x 36" concrete monument with aluminum cap.
- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
- |  |  |
|--|--|
| I-9 1" iron pipe with plastic cap.<br>S 02° E 34.90' Eastern most corner<br>Br. railing<br>N 83° W 34.85' Northern most corner<br>Br. railing<br>S 50° W 116.54' Power Pole (Nail and Tag N.W. side)<br>S 50° W 34' Center of road inter-section | H-9 4"x 36" concrete monument.<br>South 10' [ Gravel Road<br>Monument is in line with ditches to the north and south. No other witnesses were available. |
|--|--|


SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

APPROVED AND SIGNED BY Thomas G. Moran DATE 1-15-80  
CHIEF OF SURVEY PARTY  
MICHIGAN REGISTERED LAND SURVEYOR

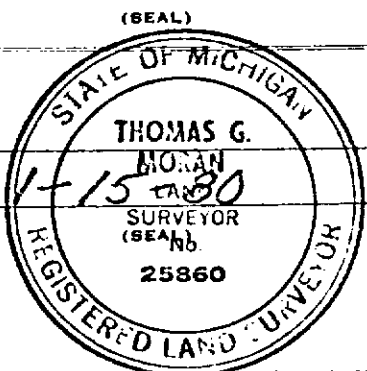

SURVEYOR'S MICHIGAN REGISTRATION NO. 25860