

DEC 28 1999

SECTION

LAND CORNER RECORDATION CERTIFICATE  
FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

FILED

S 1/4 Post - Sec 27, Paw Paw Twp.

FOR CORNERS OF:	LOCATED IN:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____, T. <u>3</u> S., R. <u>14</u> W.	<u>X</u> S., <u>X</u> W.	<u>H-11</u>
2. PROPERTY CONTROLLING IN SECTION _____, T. _____ S., R. _____ W.	N. E. S., R. W.	
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____ S., R. _____ W.	N. E. S., R. W.	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

Dec 3 9 35 AM '99

*Mark A. Smith*  
VAN BUREN CO.  
REGISTER OF DEEDS

Liber 5 Page 243

REGISTER OF DEEDS STAMP  
AND FILING NUMBER

I, CHARLES D. LOSSIE, in a field survey on 11-Nov, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

NOTE: Not More than 2 corners, all in the same town and range may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:  
1830- Government - William Brookfield, D.S.  
Corrected West between Sections 27 and 34 a distance of 39.75 chs. (2623.50') and set Quarter Section Post.


See back sheet for additional information.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:  
Found 1/2" iron bar in 1 1/4 pipe. The position of this Government Monument was accepted and restored with the approval of the Van Buren County Remonumentation Peer Group of Surveyor's on October 28, 1999 as the best available evidence of the position of the original corner.

Ratified by Peer Group in accordance with P.A. 345 of 1990  
Van Buren County Surveyor  
Date 12-3-99 *D. R. G.*

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
Tied off and set slim line Harrison Marker in Monument Box.  
Power Pole N. 40° E., 51.58' to Mag Nail and Washer  
Power Pole S. 55° E., 58.63' to Mag Nail and Washer  
Power Pole S. 45° E., 41.63' to Mag Nail and Washer  
6" Tree, S. 30° W., 79.13' to Mag Nail and Washer

Signed by Charles D. Lossie P.S.  
Surveyor's Michigan License No. 44291

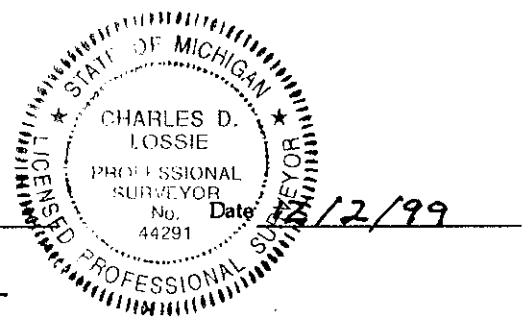

*Charles D. Lossie  
64157 41st St  
Paw Paw, MI 49079*

DEC 28 1999

South Quarter Post Section 27, Town 3 South Range 27 West  
Paw Paw Township (H-11)

SECTION

Liber 5 Page 244

10/1871- A. J. PIERCE, D.S.

Section 27, Book 4 - Page 77

Preset stake and stone - one witness stump remains center quarter post. Ran both quarter lines and properly established the corner stake, stone and iron - 15.5 lks. (10.23') due south of old stake.

Distance North is 20.1 chs. (1326.60') and continuing North 1326.60' to North Quarter Post for a total of 2653.20'.

Distance South is 20.03 chs. (1321.98') and continuing South 1321.98' to South Quarter Post for a total of 2643.96'.

Distance West is 39.645 chs. (26166.57') to West Quarter Post.

4/14/1883- A. A. FOSDICK, C.S.

Section 34, Red Book, Used Corner.

Distance South is 39.93 chs. (2635.38') and continued South 2635.38' to South Quarter Post for a total of 5270.76'.

Distance East is 40.12 chs. (2647.92')

7/14/1899 -W.H. GOSS, SURVEYOR

Section 27

Hall Drain

End 10 lks. (6.60') North and 50 lks. (33.0') East from South Quarter Post.

4/19/1947- T.A. SMITH, C.S.

Section 27

Red Book

Distance East is 2647.10'.

10/11/1972- W.Q. SMITH, C.S./D.A. MIDDLETON, R.L.S.

Section 34

Recorded Survey - (Liber 3 - Page 42).

Found 1/2" pipe.

Witnesses:

Phone Pole - N. 45° E., 49.10' to Nail.

24" Oak - S. 40° E., 60.78' to Nail

Power Pole - S. 30° W., 71.0' to Nail

2' West of Centerline of North and South Road

8' South of Centerline of East and West Road

Distance West is 1312.60' and continuing West 1312.60' to Northwest Corner for a total of 2625.2'.

10/11/1972- Recorded Survey - (Liber 3 - Page 62) Section 34

Same witnesses as above.

Distance South is 2626.54' and continued South 2644.05' to South Quarter Post for a total of 5270.59'.

10/31/1972- D.R. GILCHRIST, R.L.S.

Recorded Certificate (Liber 1 - Page 594) same as above.

Recorded Surveys (Liber 4 - Page 35 and Liber 5- Page 66) same as above.

Found 1/2" iron at Center Quarter Post.

Distance South is 2626.54'.

4/23/1974 - W. Q. SMITH, R.L.S.

Section 34

Recorded Survey (Liber 5 - Page 115) same as above.

5/31/1982 - D.R. GILCHRIST, C.S.

Section 34

Recorded Survey (Liber 9 - Page 363) same as above.

5/12/1992 - Survey Drawing (Section 34) same as above.

12/31/1992 - Survey Drawing (Section 34) same as above.

3/15/1994 - J. C. HUNT, R.L.S.

Section 34

Recorded Survey (Liber 10 - Page 82).

Found 1/2" iron.

Witnesses:

S. 45° E., 41.50' - Set Nail and Tag in Northeast face of pole.

N. 45° E., 51.63' - Set Nail in Northwest face of pole.

S. 75° W., 50.70' - South end of C.M.P.

N. 80° W., 59.85' - North end of 15" C.M.P.