

SURVEY & REMONUMENTATION COMMISSION
 APR 25 1995

RC 1543


LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

L127800PA025

For corners in	Located in:	Corner Code #
<u>WAYNE</u> (County)		
1. Public Land Survey	T <u>LSRBE</u>	<u>C-5</u>
	T _____	_____
	T _____	_____
	T _____	_____
2. Property controlling in Section	S _____	_____
	S _____	_____
3. Miscellaneous Property in Sec.	S _____	_____
	S _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

Compliance with ACT 345, P.A. 1990
 APPROVED ON: 12-21-94 *DBJ*
 WAYNE COUNTY REMONUMENTATION PEER GROUP COMMITTEE

Register of Deeds Stamp & File Number

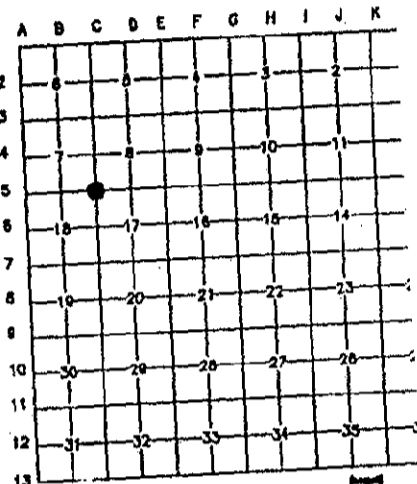

RC 1543

I, PAUL V. SCHWIMMER, in a field survey on DECEMBER 16, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate

- A. Description of original monument and accessories and/or subsequent restoration:
- | | |
|--|---|
| DRIG. GOVERNMENT NOTES 1815, WITNESSED BY BALESS JIMMINGS - SET POST (1) | BOARD OF WAYNE CO. RD. COMM IRON FOUND IN 1970 (10) |
| IRONWOOD 5' N86°E 20 LINKS (2) | N.E. 46.49 WOODEN MARKER (11) |
| IRONWOOD 5' N79°W 4 LINKS (3) | S.E. 66.66 WOOD FENCE POST (12) |
| WAYNE CO. BUREAU OF TAXATION (1930'S) IRON (4) | S.W. 30.39 DE. POLE (7) |
| N.E. 41.87 TELE POLE (5) | N.W. 47.78 IRON (13) |
| S.E. 131.92 ED. POLE (6) | ACT 132 SURVEY L18818 PA645 |
| S.W. 30.46 TELE POLE (7) | IRON PIN FOUND IN 1973 (10) |
| S.W. 66.92 5' BASSWOOD (8) | BY DONALD KNAPP RLS #13773 |
| N.W. 43.71 TELE POLE (9) | |

CONTINUED ON BACK

B. Description of corner evidence and/or method applied in restoring or reestablishing corner:
 C-5 THIS POINT TRACKS VERY WELL FROM 1930 TO PRESENT. I FELT THAT THERE WAS NO NEED TO MEASURE TO CORRESPONDING CORNERS.

\$ 16.00 MISCELLANEOUS RECORDING
 28 DEC 94 8:15 A.M. RECEIPT# 4A
 RECORDED
 FOREST E. YOUNGBLOOD, REGISTER OF DEEDS
 WAYNE COUNTY, MI

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- C-5 FOUND 3/4" IRON PIPE 0.8' BELOW GRAVEL ROAD SURFACE
- N12°E 100.82 NAIL W/ W.C.R.C. TAG IN POWER POLE (14)
- N40°E 87.49 CORNER POST 6' HIGH CHAIN LINK FENCE
- N60°E 59.80 CONSUMERS POWER MARKER (23)
- S65°E 127.92 N.W. TIP I-BEAM @ N. END OF WEST GUARD RAIL (25)
- S45°W 33.27 CONSUMERS POWER MARKER (24)
- S50°W 31.97 NAIL W/ W.C.R.C. TAG IN POWER POLE (26)
- S55°W 46.42 1/2" IRON ROD (27)
- N48°W 47.78 1" IRON PIPE (13)
- N45°W 46.27 FD NAIL W/ TAG IN 6" POST
- N10°W 132.94 NAIL W/ W.C.R.C. TAG IN POWER POLE (17)

THE SELECTED LOCATION IS ACCEPTED BY THE CONTRACTOR AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.

Signed by Paul V. Schwimmer
 Surveyor's Michigan License No. 24618

Date 12-21-94

2 R
 14 D
 MISC

BOARD OF WAYNE CO. RD. COMM
 1' IRON FOUND IN 1974 (10)
 N.E. 100.73 NAIL W/ W.C.R.C. TAG IN MBT POLE (14)
 N.E. 70.00 WOOD POST (15)
 S.E. 127.91 NAIL W/ W.C.R.C. TAG IN DE POLE (7)
 S.W. 30.38 NAIL W/ W.C.R.C. TAG IN DE POLE (7)
 N.W. 47.74 3/4' IRON (13)
 N.W. 132.97 NAIL W/ W.C.R.C. TAG IN DE POLE (17)

ACT 74 SURVEY L19080 PA305
 FND 1/2' IRON IN 1975 (19)
 BY RAMOND DONNELLY RLS #21563
 N45°W 47.78 1' IRON (13)
 N50°E 46.49 3/8' BOLT IN WOODEN FENCE POST (11)
 S30°E 66.66 NAIL IN WOODEN FENCE POST (12)
 S40°W 30.39 NAIL IN DE POLE (7)

BOARD OF WAYNE CO. RD. COMM
 1/2' IRON OVER #4 REBAR FOUND IN 1977 (19)
 N.E. 100.84 NAIL W/ W.C.R.C. TAG IN MBT POLE (14)
 N.E. 69.99 WOOD FENCE POST (15)
 S.W. 30.38 NAIL W/ W.C.R.C. TAG IN DE POLE (7)
 N.W. 47.76 3/4' IRON (13)
 N.W. 132.91 NAIL W/ W.C.R.C. TAG IN DE POLE (17)
 N.W. 41.47 CENTER 4' STEEL ENCASED CONC. MON (20)

ACT 74 SURVEY L18145 PA269
 FND 1' IRON IN 1979 (21)
 BY JOSEPH COCUZZA RLS #13579
 N.W. 45.97 POST WITH 'WARNING' SIGN (22)
 N.E. 59.39 CONSUMERS POWER MARKER (23)
 S.W. 33.59 CONSUMERS POWER MARKER (24)
 N.W. 47.76 IRON (13)
 S.E. 129.25 I-BEAM POST OF GUARD RAIL (25)

ACT 74 SURVEY L24506 PA902
 FND 3/4' IRON IN 1990 (21)
 BY RAMOND DONNELLY RLS #21563
 N42°W 47.80 1' IRON PIPE (13)
 N47°E 46.44 3/8' BOLT IN WOODEN FENCE POST (11)
 S43°W 32.01 P.K. NAIL W/ RLS TAG IN DE POLE (26)
 S49°W 46.49 1/2' IRON (27)

BC
 100
 1003

