

CURVEY & RECONSTRUCTION

RC 1214

FEB 28 1994

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

U27003 PA 592

COMMISSION
For corners in

WAYNE

(County)

Located In:


Corner Code #

- 1. Public Land Survey T 1 S R 8 E K 7
2. Property Controlling in Section S T R
3. Miscellaneous Property in Sec. S T R

- 4. Lot No. Recorded Plat
5. Private Claims

93 DEC -3 AM 8:51
Register of Deeds Stamp & File Number

I, PAUL V. SCHWIMMER, in a field survey on NOVEMBER 2, 1993, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

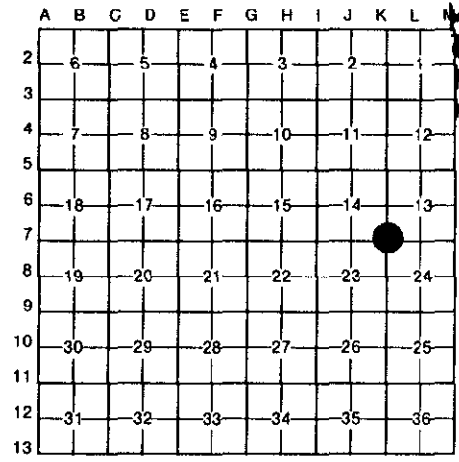

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

NO G.L.D. WITNESSES REMAIN, A POST WAS SET BY JOSEPH WAMPLER IN THE ORIGINAL SURVEY OF THE TOWNSHIP WHICH WAS COMPLETED MARCH 14, 1816.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

PREVIOUSLY RECORDED IN:
1972 ACT 132 SURVEY LIBER 18073, PG 326 - FOUND MONUMENT
1976 LIBER 19615, PG 135
1987 ACT 132 ROSKELLY WITNESSES
FOUND CONC. MONUMENT IN MON. BOX

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

FOUND CONC. MONUMENT IN MONUMENT BOX NEAR CENTERLINE OF FIVE MILE ROAD
S 45° E 72.95' SET NAIL & TAG IN W FACE 16' OAK (PREVIOUS WITNESS)
S 25° W 24.74' SET NAIL & TAG IN E FACE 14' ASH
S 75° W 57.98' SET NAIL & TAG IN SE FACE 14' ASH (PREVIOUS WITNESS)
N 40° W 94.89' SET NAIL & TAG IN SW FACE P.P.
NORTH 59.15' SET NAIL & TAG IN W FACE P.P. (PREVIOUS WITNESS)
S 80° W 106.34' CENTERLINE FIRE HYDRANT (PREVIOUS WITNESS)
NLY 60.18' FOUND IRON (PREVIOUS WITNESS)
SLY 59.94' FOUND MONUMENT (DAMAGED) (PREVIOUS WITNESS)
DISTANCE TO L 7 MEASURED AS 2681.18' RECORDED IN 1930 AS 2681.19'
SET REMONUMENTATION DISC AND CAP ON MONUMENT
THE SELECTED LOCATION IS A CAREFUL AND FAITHFUL PERPETUATION OF THE POSITION OF THE ORIGINAL CORNER



Signed by Paul V. Schwimmer

Date NOVEMBER 8, 1993

Surveyor's Michigan License No. 24618

Handwritten initials: 2R, 11KD