

APR 05 1996

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

\$ 4.00 REMONUMENTATION
 \$ 7.00 DEED

19 DEC 95 11:54 A.M. RECEI A
 RECORDED
 FOREST E. YOUNGBLOOD, REGISTER EDG
 WAYNE COUNTY, MI

For corners in **COMMISSION**
 Wayne

Located In: Detroit Corner Code ≠

LIBER 28471 PAGE 674

Compliance with
 ACT 345, P.A. 1990

APPROVED ON: 12-12-95
 WAYNE COUNTY REMONUMENTATION
 PEER GROUP COMMITTEE

Register of Deeds Stamp & File Number

	1S.	10E.	M-11
1. Public Land Survey	T _____ R _____	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	S _____ T _____ R _____	_____


4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

William Roskelly in a field survey on October 21, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules thereore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
M-11) Northeast corner section 36, T.1 S., R.10 E., Redford Township
 G.L.O. (1830's) Joseph Fletcher set corner post witnesses: Beech 10 N6 8 E9 (gone), Sug 9 S82 W20 (gone)
 W.P.A. (1930's) No witnesses found.
 No R.C.'s or C.S.'s found on file at Wayne County Register of Deeds.

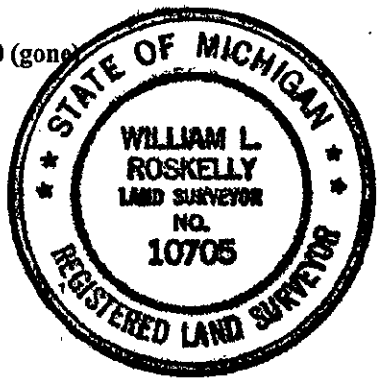

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
M-11) Northeast corner section 36, T.1 S., R.10 E., Redford Township
 Found a monument box with an iron pipe in a concrete monument at the intersection of Plymouth and Greenfield Roads asphalt. This point is common to A-11 N.W. corner of section 31, T.1 S., R.11 E.
 Verified corner location by comparing City of Detroit data with field measurements:
 M-11 to L-11 Record = 2606.91 Measured = 2606.53 M-11 to M-12 Record = 2628.90 Measured = 2629.14 Angle line M-11 & M-10 to M-11 & A-11 T.1 S., R.11 E. Record 89° 41' 33" Measured 89° 41' 19" Angle line M-11 & M-12 to M-11 & L-11 Record = 90° 32' 20" Measured = 90° 30' 05"

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
M-11) Northeast corner section 36, T.1 S., R.10 E., Redford Township
 Found a monument box with an iron pipe in a concrete monument at the intersection of Plymouth and Greenfield Roads asphalt. This point is common to A-11 N.W. corner of section 31, T.1 S., R.11 E.
 The selected location is accepted by the contractor and is generally accepted by professional surveyors as the best available evidence of the position of the corner.

WITNESSES:
 Set nail and WCR tag N.W. face P. pole N. 65° E. Distance = 58.69
 Set nail and WCR tag S.W. face P. pole S. 22° E. Distance = 71.17
 Set nail and WCR tag N.W. face P. pole S. 47° W. Distance = 69.27
 Set nail and WCR tag S.W. face P. pole N. 44° W. Distance = 64.99
 Placed Wayne County Remonumentation brass marker and cap #10705

Signed by William Roskelly Date 12-14-95
 Surveyor's Michigan License No. 10705

95271390

Handwritten initials