

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

FEB 28 1994

For corners in

Wayne

(County)

COMMISSION

Located In:

Corner Code ##

- 1. Public Land Survey T 3S. R 8 E. G-11
- T \_\_\_\_\_ R \_\_\_\_\_
- T \_\_\_\_\_ R \_\_\_\_\_
- T \_\_\_\_\_ R \_\_\_\_\_
- 2. Property Controlling S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_
- in Section S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_
- 3. Miscellaneous S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_
- Property in Sec. S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

Compliance with  
ACT 345, P.A. 1990  
APPROVED ON: 12-7-93 *DBJ*  
WAYNE COUNTY REMONUMENTATION  
PEER GROUP COMMITTEE

Register of Deeds Stamp & File Number

- 4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_
- 5. Private Claims \_\_\_\_\_

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2				
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

I, William L. Roskelly in a field survey on October 29, 19 93  
do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:

No G.L.O. witnesses remain. J. Wampler G.L.O. (1819) set corner post.  
W.P.O. (1930's) found stone.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found monument box with iron pipe at Hull and Sumpter roads.

Verified corner position using W.P.A. map. Distance G:11 to G:10 2703.88 recorded, 2704.22 measured. Distance G:11 to F:11 2653.98 recorded, 2654.37 measured. Angle G:11-G:10 to G:11-F:11 recorded 82 deg 13' 10", measured 82 deg 12' 20"

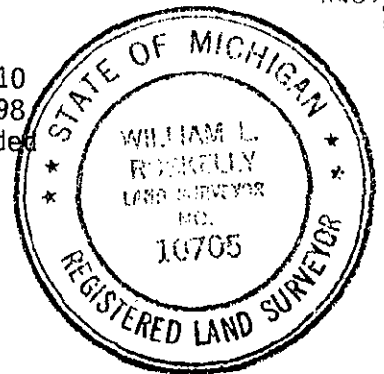

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-11: Section corner 27,28,33 & 34 found monument box with iron pipe at Hull & Sumpter Roads. The selected location is accepted by the Contractor and is generally accepted by professional surveyors as the best available evidence of the position of the original corner. Placed Wayne Co brass disk with license #1070

- 1. Set WCR tag S.E. face of P. pole N. 64° E. distance 60.86
- 2. Set WCR tag S. face P. pole S. 70° E. distance 114.47
- 3. Top bolt hydrant S. 50° E. distance 92.29
- 4. Found cut cross on N.E. bolt of Clark gas station sign S. 60° W. distance 89.47
- 5. Set WCR tag S.W. face p. pole N. 60° W. distance 87.90

Tax record Wayne County Bureau of Taxation #137

Signed by

*William L. Roskelly*

Date November 9, 1993

Surveyor's Michigan License No. 10705

2R 11KT

RECEIVED  
 REGISTERED LAND SURVEYORS  
 MICHIGAN STATE BOARD  
 NOV 10 1993  
 12:11 PM '93