

RC 1444
STATE OF MICHIGAN
LAND CORNER RECORDATION CERTIFICATE
NOT A COMMON CORNER
Filing Requirement of Act 74, Mich. P.A. 1970

L127794PA314

M-13 Page 1

For corners in
Wayne
 County Located in: Sumpter Corner Code

- | | | | |
|------------------------------------|--------------|--------------|---------|
| 1. Public Land Survey | T <u>4</u> S | R <u>8</u> E | M-13 |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| | T _____ | R _____ | _____ |
| 2. Property Controlling in Section | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |
| 3. Miscellaneous Properly in Sec. | S _____ | T _____ | R _____ |
| | S _____ | T _____ | R _____ |
4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

Compliance with
ACT 345, P.A. 1990
 APPROVED ON: 12/9/94 W.C.
WAYNE COUNTY REMONUMENTATION
PEER GROUP COMMITTEE

Register of Deeds Stamp and File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

RC 1444

I, Kenneth S. Wilkerson in a field survey on 06/06/1994
 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management, or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below.

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restorations:
 01/01/1816 Wampler G.L.O. Set post
 15" ELM N76W 17 LINKS (GONE)
 36" ELM S21E 4 LINKS (GONE)

(Witnesses Continued on Back ...)


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 Fd. 5/8" re-rod in gravel, rd. 6" below surface @ int. of c/s of Exeter & Oakville-Waltz Rds. Dist to L-13 = 2646.46 (R), 2647.62' (M) & Dist. to M-12 = 2678.59 (R), 2678.69' (M)

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 06/06/1994 Wilkerson 21584 O.H.M. Remon.
 SET W.C.R. WASHER & CAP ON CORNER.
 12 FD. SPIKE W/WASHER N.E./S P.P. S 72 W 56.81'
 14 W.C.R. TAG S.W./S P.P. N 70 E 37.75'
 15 W.C.R. TAG N.E. SIDE 22" ELM S 13 E 89.09'
 16 W.C.R. TAG S.W./S P.P. N 36 W 79.03'

\$ 16.00 MISCELLANEOUS RECORDING
 21 DEC 94 5:10 P.M. REGISTERED DEEDS
 COUNTY OF WAYNE REGISTER OF DEEDS

We conclude that after careful study of the record documentation and field observations, that this corner is accepted as the best available evidence of the position of the original corner.

Signed by [Signature]
 Drafted by Kenneth S. Wilkerson
 Surveyor's Michigan License No. 21584
 Orchard, Hiltz and McCliment, Inc. 34935 Schoolcraft Road Livonia, MI 48150

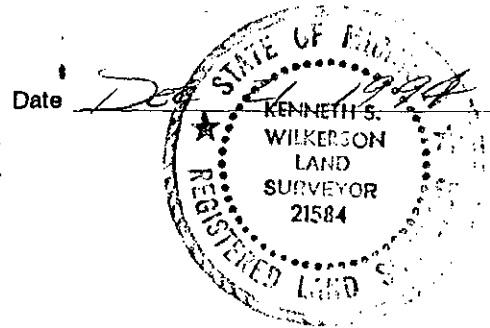

SURVEY &
 REMONUMENTATION

JAN 26 1999

SECTION

Z R
 14 13 - 10, 50.

^ (Continued) Description of original monument and accessories and/or subsequent restorations:

01/01/1930

Wayne Co.
Bureau of
Taxation

Iron

L27794PA315

- 1 FENCE POST S.W. 35.50' (GONE)
- 2 ED. POLE N.W. 80.80' (GONE)
- 3 14" ELM N.E. 40.64' (GONE)
- 4 STONE NORTH 2113'
- 5 20" APPLE S.E. 56.39' (GONE)
- 17 DIST = 2678.59' TO M-12
- 18 DIST = 2647.51' TO K=13

06/24/1970

Johns

W.C.R.C.

Iron bar

- 2 ED POLE N.W. 80.70' (GONE)
- 6 M.B.T. POLE S.E. 88.92' (GONE)
- 7 DE POLE S.E. 56.75' (GONE)

06/14/1978

Lopota

W.C.R.C.

1/2 steel re-rod

- 8 M.B.T. POLE N.E. 81.72' (GONE)
- 9 CENTERLINE HYD. N.E. 79.57' (GONE)
- 10 DE POLE S.E. 65.71' (GONE)
- 11 DE POLE S.W. 80.00' (GONE)

05/02/1980

Young

3/8" re-rod

- 2 SPIKE W/WASHER IN DE POLE N.W. 80.62' (GONE)
- 6 SPIKE W/WASHER IN DE POLE 88.88' (GONE)
- 12 SPIKE W/WASHER IN DE POLE S.W. 56.71'
- 13 SPIKE W/WASHER IN GUY POLE N.W. 65.65' (GONE)

SURVEY &
REMONUMENTATION

JAN 26 1999

SECTION