

**SURVEY & REMONUMENTATION**

**RC 1583**

\$ 13.00 MISCELLANEOUS RECORDING  
28 DEC 94 9:38 A.M. RECEIPT# 160

APR 25 1995

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED  
FOREST E. YODanis, REGISTRE OF DEEDS  
WAYNE COUNTY, MI

**COMMISSION**

For corners in

**L127800PA650**

Wayne (County)	Located In: Huron Township	Corner Code #
1. Public Land Survey	T <u>4S</u> R <u>9E</u>	<u>C-5</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____


Compliance with ACT 345, P.A. 1990

APPROVED ON: 12-7-94 *RFJ*  
WAYNE COUNTY REMONUMENTATION PEER GROUP COMMITTEE

Register of Deeds Stamp & File Number.

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, Randy Kolehouse, in a field survey on October 19 19 94, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

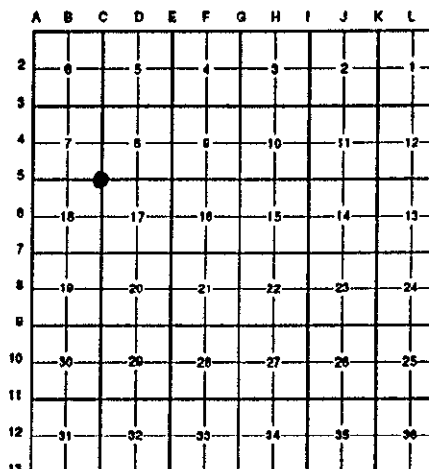

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-5	1817 1930's 1973 1976 1982	G.L.O. Notes WPA Notes WCRC Notes Cert. Survey L. 19873 P. 386 Cert. Survey L. 21350 P. 589	N/A N/A N/A Arthurs N/A	Post Iron Monument in Monument Box WCRC Monument in Hand Hole WCRC Monument
-----	----------------------------	---	-------------------------------------	---

**RC 1583**

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-5 I found a concrete monument in a monument box at the C/L intersection of Judd Road running E-W and Waltz Road (asphalt) running N-S which agrees with the following witnesses:

Cert. Survey L. 19873 P. 386 Nail & Shiner SW Side Util. Pole SE'ly 39.52' (r & m)  
Cert. Survey L. 21350 P. 589 Nail & Shiner SW Side Util. Pole SE'ly 39.52' (r & m)


WCRC  
Nail & Tag SW Face MBT Pole SE'ly 39.50' (39.52' m)  
Nail & Tag SE Face MBT Pole SW'ly 62.47' (62.19' m)

Measures West to B-5 = 2615.69' (G.L.O. = 2640') (WPA = 2615.04' S-7 and 2615.34' S-18)  
Measures South to C-6 = 2681.39' (G.L.O. = 2640') (WPA = 2681.11' S-18 and 2681.13' S-17)

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-5 I set an aluminum cap stamped "Wayne Co. Remon." on existing concrete monument in an existing monument box.

"+" In Bronze Disc. WCRC BM #70-200 N 72° E 63.11'  
Nail w/Tag WCRC SW Face Util. Pole S 46° E 39.52'  
Nail w/Tag WCRC SE Face Util. Pole S 67° W 62.19'  
Nail w/Tag WCR SW Face Util. Pole N 50° W 42.08'



The selected location is accepted by the Contractor and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

Signed by Randy J. Kolehouse Date 12/14/94  
Surveyor's Michigan License No. 25854