

**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in Wexford (County) Located In: \_\_\_\_\_ Corner Code # \_\_\_\_\_

1. Public Land Survey	T	<u>23N</u>	R	<u>10W</u>	<u>B-13</u>
	T	_____	R	_____	_____
	T	_____	R	_____	_____
	T	_____	R	_____	_____
2. Property Controlling in Section	S	_____	T	_____	_____
	S	_____	T	_____	_____
3. Miscellaneous Property in Section	S	_____	T	_____	_____
	S	_____	T	_____	_____

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_

5. Private Claims \_\_\_\_\_

**RECEIVED**  
 1996 DEC 13 PM 3:32  
*Linda Doughmiller*  
 WEXFORD COUNTY, MI  
 REGISTER OF DEEDS  
 Register of Deeds Stamp & File Number

I, George D. Smith, in a field survey on July 23, 19 96, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A	B	C	D	E	F	G	H	I	J	K	L
2	6	5	4	3	2	1					
3											
4	7	8	9	10	11	12					
5											
6	18	17	16	15	14	13					
7											
8	19	20	21	22	23	24					
9											
10	30	29	28	27	26	25					
11											
12	31	32	33	34	35	36					
13											

**A. Description of original monument and accessories and/or subsequent restoration:**

- B-13) 1837 GLO Quarter Section Post by John Brink, Deputy Surveyor, Beech 11 N 56 1/2° E 36, Beech 8 N 71 1/2° W 34
- 1893 Devoe Survey, Liber 1, Page 175, corner found no description given, Maple 6 S 58° E 69, Maple 4 S 1° E 35
- 1969 WCRC, found 3/4" pipe 4" deep, 26" Maple NE 43.60' 26" Maple, NW 43.10' 20" Maple, S 10° E 27.10 (blazed with bottle caps)
- 1989 Wetherell RLS# 24624, Certificate of Survey, Liber 69, Page 208, corner found no description or witnesses given
- 1990 Wetherell RLS# 24624, Certificate of Survey, Liber 69, page 209, corner found no description given 28" Maple N 54° E 44.35', 4" Maple S 58° E 44.46', 36" Maple S 5° W 23.56', 6" ironwood N 1° W 40.16'

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**

- B-13) Found pinched pipe in Centerline Road East-West and in fence line to South, also found 1 of 1893 Devoe witness trees. This corner is accepted as the best available evidence of the position of the original corner being the 1/4 corner common to Section 31, T23N, R10W and Section 6, T22N, R10W.


SURVEY &  
 REMONUMENTATION  
 MAY 20 1997  
 COMMISSION

Peer Group Reviewed and Approved  
 Date: 14 Nov 96  
*Richard D. Wilcox*  
 Richard D. Wilcox, Wexford County Surveyor

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

- B-13) Replaced pinched pipe with 5/8"x36" iron with Wexford County Brass cap stamped S 1/4 31, 1996 PS#39098.

- N54°E - 44.46 - 28" Maple
- S58°E - 44.55 - 4" Maple
- S15°E - 27.21 - 20" Maple (Dead)
- N01°W - 40.39' - 6" Ironwood
- S05°W - 23.65' - 36" Maple (Devoe S1°E - 4" Maple 23.1')

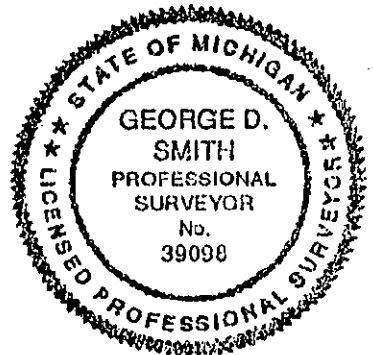

Signed by George D. Smith  
 Surveyor's Michigan License No. #39098

Date 11-21-96