

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In:
Wexford County Located In _____ Corner Code # _____
 (County)


1. Public Land Survey	T	<u>24N</u>	R	<u>11W</u>	<u>I-1</u>
	T	_____	R	_____	_____
2. Property Controlling in Section	S	_____	R	_____	_____
	S	_____	R	_____	_____
3. Miscellaneous Property in Section	S	_____	R	_____	_____
	S	_____	R	_____	_____

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on June 29, 2004 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

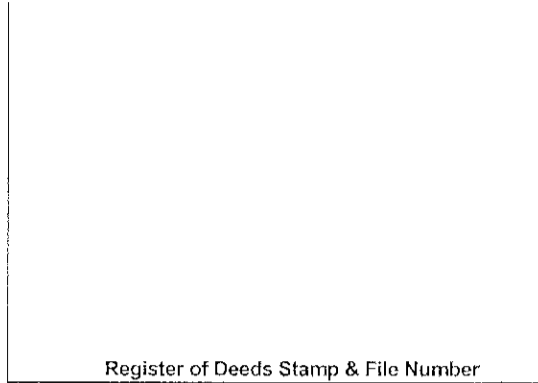

	A	B	C	D	E	F	G	H	I	J	K	L	M
1									●				
2	6		5		4		3			2		1	
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

<u>I-1</u> – GLO – Set Post – J. Brink – 1838	E 1/16 Fence Cor. N & W
Beech 7" N26°W 43 L.	5" Maple N12°W 24.2'
Beech 8" N28°E 30 L.	8" Maple S76°W 26.9'
- GLO – Sub – T24N R11W – Int. N. boundary at post -	4" W. Pine S29°E 17.1'
J. Brink 1839 – Beech 9" S20½°E 25 L;	8" Tw. Maple N30°E 19.2'
Beech 18" S72½°W 36 L.	
- LCRC – L. 2, p. 21 – Grand Traverse County Records -	
C. F. Roser - 1974	
Set Standard Wexford Co. Mon. and Cedar post with	
location tag on straight line through S1/4 and SW Cor.	
Sec. 34 at double distance from S ¼ to	

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

I-1 – Standard Section Corner common to Sections 34 & 35, T25N, R11W, and Sections 2 & 3. T24N, R11W. Fnd. 4" Wexford County Aluminum Monument. Stps. of DNR witnesses found fit position of monument. Wexford County monument accepted as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I-1 – 4" Wexford County Aluminum Capped Monument
 S80°W 27.24' to set N & T in Northwest Side 13" Maple (CFR)
 N52°W 35.50' to set N & T in Northeast Side 6" W. Pine
 N45°E 10.66' to set N & T in Northwest Side 3" W. Pine
 S38°E 25.60' to set N & T in Northeast side twin 12" S. Maple
 Set Blue Carsonite Post 1' N.



Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 11/1/2004