


REVENUE  
MAY 10 2000

SECTION


LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

WASHTENAW (County)	Located in:	Corner Code #	
1. Public Land Survey AUGUSTA TWP	T <u>4S</u> R <u>7E</u>	<u>F-9</u>	 5094703 Page: 1 of 2 02/07/2000 02:55P L-2 P-280 Peggy M. Haines - Washtenaw Co. CORREM
2. Property controlling in Section	S _____ T _____ R _____	_____	
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____	
4. Lot No. _____, Recorded Plat _____	S _____ T _____ R _____	_____	
5. Private Claims _____	S _____ T _____ R _____	_____	

Register of Deeds Stamp & File Number

I, LORI E. BEYER, in a field survey on OCTOBER 03, 19 99, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

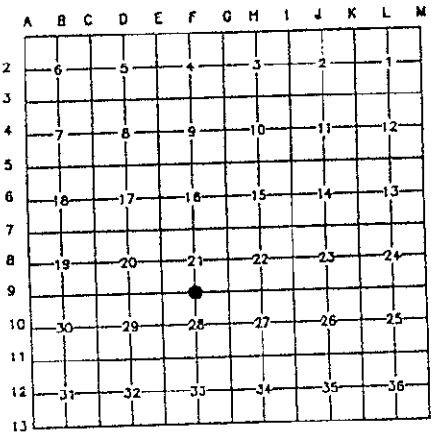

1999 REMONUMENTATION CORNER

A. Description of original monument and accessories and/or subsequent restoration:

G.L.O. - JOSEPH FRANCIS - 1819  
 SET POST  
 8" ASH S 09° E 7 LINKS  
 13" BEECH N 06° W 12 LINKS

Continued on Back


B. Description of corner evidence and/or method applied in restoring or reestablishing corner:

FOUND 5/8" REBAR IN MONUMENT BOX IN THE CENTERLINE OF WILLOW RD.  
 CHECKED WITNESSES, SET ALUMINUM REMON. CAP STAMPED WITH #41092 OVER 5/8" REBAR.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

5/8" IRON REBAR WITH ALUMINUM REMON. CAP STAMPED #41092 IN MONUMENT BOX AT CENTERLINE OF WILLOW RD.

- |                        |         |        |                         |
|------------------------|---------|--------|-------------------------|
| 6) 30" STUMP           | N 02° E | 39.7'  |                         |
| 13) 38" DYING CHERRY   | N 41° W | 51.5'  |                         |
| 9) W. END 24" CMP      | N 50° W | 40.2'  |                         |
| 11) E. END 24" CMP     | N 45° E | 38.5'  |                         |
| 12) 26" COTTONWOOD     | S 42° W | 41.91' | SET NAIL/TAG EAST SIDE  |
| 14) 12" TWN BASSWOOD   | N 78° E | 99.70' | SET NAIL/TAG SOUTH SIDE |
| 15) 11" RED OAK        | N 53° W | 59.63' | SET NAIL/TAG WEST SIDE  |
| 16) 12" MULTI BASSWOOD | S 39° E | 56.21' | SET NAIL/TAG NORTH SIDE |



AFTER CAREFUL EXAMINATION OF RECORD DOCUMENTATION AND FIELD OBSERVATIONS, I BELIEVE THIS POINT SHOULD BE ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.

THIS CORNER WAS RATIFIED BY THE PEER REVIEW COMMITTEE ON NOVEMBER 22, 1999.

Signed by Lori E. Beyer Date Dec 03, 1999  
 Surveyor's Michigan License No. 41092

APPROVED  
 DATE 11/22/99  
 CO. REP. [Signature]

F-9 CONTINUED FROM PARAGRAPH A

WASHTENAW COUNTY ROAD COMMISSION GRID BOOK - M. ROYCE, R. GRAF - OCTOBER 1928  
FOUND FLAT POINTED STONE. SET AN IRON PIPE UNDER THE STONE.

1) 20" APPLE	N 32° W	127.4'
2) 20" W. CHERRY	S 24° W	68.65'
3) 18" APPLE	N 50° E	72.85'
4) 22" TAMARACK	N 76° E	118.25'

WASHTENAW COUNTY ROAD COMMISSION GRID BOOK - HAND POSTED - R.B. 6-61  
MONUMENT BOX

5) 48" ELM	S 51° W	45.0'	NAIL
6) 16" ELM	N 02° E	39.47'	NAIL
7) 3" ELM	S 48° E	41.7'	NAIL

L.C.R.C. LIBER 2 PAGE 93 - GLENN RICHARD #13040 - MAY 1972

FOUND 3/4" REBAR IN MONUMENT BOX

8) 10" MAPLE	N 50° W	51.36'	SPIKE
9) CULVERT	N 50° W	40.0'	X-CUT IN TOP
10) CULVERT	S 40° W	29.63'	X-CUT IN TOP
11) CULVERT	N 55° E	38.36'	X-CUT IN TOP
6) 20" ELM	N 02° E	39.50'	SPIKE

L.C.R.C. LIBER 4 PAGE 50 - ROBERT JAGOW #6998 - SEPTEMBER 1975

FOUND 1/2" REBAR IN MONUMENT BOX

12) 10" POPLAR	S 30° W	42.0'
6) 26" ELM	NORTH	39.4'
13) 16" CHERRY	N 47° W	51.1'
9) W. END 24" CMP	N 48° W	40.2'
11) E. END 24" CMP	N 45° E	38.5'

P.A. 132 CERTIFICATE OF SURVEY - UNRECORDED - C. WILSON & ASSOC. - MAY 1986

FOUND 3/4" IRON BAR IN MONUMENT BOX

6) 26" ELM STUMP	N 02° E	39.5'
13) 16" CHERRY	N 50° W	40.0'
9) W. END 24" CMP	N 48° W	40.2'
11) E. END 24" CMP	N 45° E	38.5'



- Copy -

SURVEY &  
RECORDS SECTION

MAY 03 2000

SECTION