

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>23</u> T. <u>2</u> N. R. <u>15</u> W.		J-8, I-8
2. PROPERTY CONTROLLING IN SECTION _____, T. _____ S., R. _____ E. W.		
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____ S., R. _____ E. W.		
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

ALLEGAN Co

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Donald L. Bissell, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on November, 19 83, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

<p>J-8 Found: 5/8" Iron Rod with notes from Mitchell Surveys of Glenn, Michigan Replaced with 4"x36" Conc. Mon. with Alum. Cap</p>	<p>I-8 Found: 5/8" Iron Rod with notes from Mitchell Surveys of Glenn, Michigan Replaced with 4"x36" Conc. Mon. with Alum. Cap</p>
--	--

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

<p>J-8 Center Section 23 4"x36" Conc. Mon. N22°W - 44.82' - 36" Oak N40°E - 44.46' - 24" Oak S70°E - 63.54' - 24" Oak S51°W - 27.53' - 11" Oak N50°E - 15' - C Rd. Intersection</p>	<p>I-8 W 1/4 Corner, Section 23 4"x36" Conc. Mon. S41°E - 62.83' - 6" Cherry N20°W - 66.75' - 4" Scotch Pine N65°E - 25.70' - Gas Shut off (middle on) N81°E - 107.35' - 28" Oak</p>
---	--

SIGNED BY _____ DATE _____


SURVEYOR'S MICHIGAN REGISTRATION NO. _____

(SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____

APPROVED AND SIGNED BY Donald L. Bissell DATE 12-28-83
CHIEF OF SURVEY PARTY
MICHIGAN REGISTERED LAND SURVEYOR

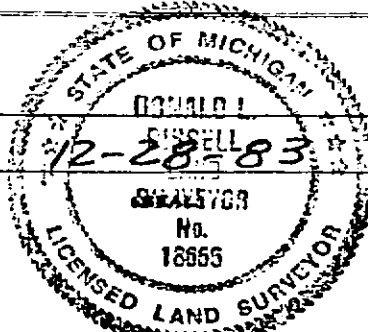

SURVEYOR'S MICHIGAN REGISTRATION NO. 18655