

**SURVEY & REMONUMENTATION**

SEP 29 1994

COMMUNICATION

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in  
Gogebic  
(County)

Located In: Corner Code #

- 1. Public Land Survey T 47N R 47W M-9  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_
- 2. Property Controlling S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
in Section S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_
- 3. Miscellaneous S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
Property in Sec. S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

- 4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_
- 5. Private Claims \_\_\_\_\_

Section corner common to Sections 19 & 30, T47N, R46W and Sections 24 & 25, T47N, R47W.

I, John R. Garske, in a field survey on July, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

Original survey by William A. Burt in 1847. Set sugar post. Original bearing trees: Elm 28" - S79°E, 37 links; Sugar 12" - N61°W, 49 links. Bearing set by Austin Burt in 1851; Sugar 14" - S15°W, 20 links; Y. birch 22" - N40°E, 45 links.

The corner position was found by John P. Goss, RLS 23509 in August 1991 consisting of a concrete monument. He recorded the corner in Liber 4 of land corners, P. 5. Accessories: P. pole - S56°E, 56.50 feet; P. pole - S40°W, 41.13 feet; Elm 7" - N70°W, 27.73 feet.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I found a P.K. nail marking the corner position in the center of the road intersection which checks with the ties from Goss' certificate. I updated the corner as noted below to bring it up to county and state specifications.

Act 74 research on file with County Register of Deeds Office.

**PEER GROUP Approved**

Richard P. Drabm 9/14/94

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I replaced the found P.K. nail with a 2 1/2" brass cap with a 2" stem in anchoring cement. Cap is stamped: S-19, S-24, S-25, S-30, T47N, R47-46W, 1994, RLS 28410. I established the following bearing trees and reference objects: A reference monument consisting of a 2 1/2" x 30" aluminum pipe with a 3 1/4" aluminum cap stamped to indicate the corner position as follows: R.M. - N50°E, 57.87 feet with a steel sign post 1.75 feet away; existing P. pole - S40°W, 41.13 feet; existing P. pole - S56°E, 56.50 feet; existing elm 8" - N70°W, 27.73 feet; Lt. pole - S40°W, 44.02 feet.


Register's Office } ss.  
Gogebic County }

Received for record the  
16 day of SEPT  
A. D. 1994 at 4:10 o'clock  
1 m., and recorded in  
Liber 5 of CORNERS  
on page 131  
Ramona Collins, Deputy  
Register of Deeds

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

Signed by John R. Garske Date 8/31/94  
Surveyor's Michigan License No. 28410

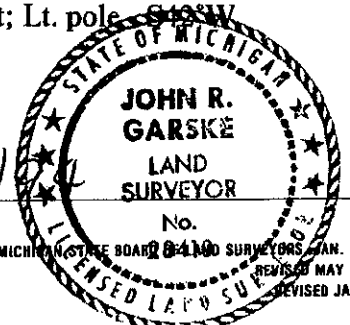

FORM APPROVED BY MICHIGAN JUSTICE BOARD 8-1-90 SURVEYORS, JAN. 28, 1971  
REVISED MAY 14, 1975  
REVISED JAN., 1983